

APPROVAL SHEET

MULTILAYER CERAMIC CAPACITORS

High Capacitance Series

0402 to 1812 Sizes

X7R, X5R, X6S & Y5V Dielectrics

RoHS Compliance

*Contents in this sheet are subject to change without prior notice.

1. DESCRIPTION

MLCC consists of a conducting material and electrodes. To manufacture a chip-type SMT and achieve miniaturization, high density and high efficiency, ceramic condensers are used.

WTC high capacitance MLCC offers low ESR and excellent frequency characteristics to be suited for coupling and decoupling applications in circuit. The high dielectric constant material X7R, X5R and Y5V are used for this series product.

2. FEATURES

- Small size with high capacitance.
- Capacitor with lead-free termination (pure Tin).

3. APPLICATIONS

- Digital circuit coupling or decoupling applications.
- For high frequency and high-density type power suppliers.
- For bypassing.

4. HOW TO ORDER


<u>1206</u>	<u>E</u>	<u>106</u>	<u>Z</u>	<u>100</u>	<u>C</u>	<u>I</u>
<u>Size</u>	<u>Dielectric</u>	<u>Capacitance</u>	<u>Tolerance</u>	<u>Rated voltage</u>	<u>Termination</u>	<u>Packaging</u>
Inch (mm) 0402 (1005) 0603 (1608) 0805 (2012) 1206 (3216) 1210 (3225) 1812 (4532)	B =X7R X =X5R S =X6S F =Y5V	Two significant digits followed by no. of zeros. And R is in place of decimal point. eg.: 106=10x10 ⁶ =10μF	K =±10% M =±20% Z =-20/+80%	Two significant digits followed by no. of zeros. And R is in place of decimal point. 6R3 =6.3 VDC 100 =10 VDC 160 =16 VDC 250 =25 VDC 500 =50 VDC 101 =100 VDC	C =Cu/Ni/Sn	T =7" reeled G =13" reeled

5. EXTERNAL DIMENSIONS

Size Inch (mm)	L (mm)	W (mm)	T (mm)/Symbol	Remark	M _B (mm)
0402 (1005)	1.00±0.05	0.50±0.05	0.50±0.05	N	0.25 +0.05/-0.10
	1.00±0.20	0.50±0.20	0.50±0.20	E	
	1.60±0.10	0.80±0.10	0.80±0.07	S	
0603 (1608)	1.60+0.15/-0.10	0.80+0.15/-0.10	0.80+0.15/-0.10	X	0.40±0.15
	1.60±0.20* ¹	0.80±0.20* ¹	0.80±0.20* ¹		
0805 (2012)	2.00±0.15	1.25±0.10	0.80±0.10	B	0.50±0.20
			1.25±0.10	D	
	2.00±0.20	1.25±0.20	1.25±0.20	I	
1206 (3216)	3.20±0.15	1.60±0.15	0.95±0.10	C	0.60±0.20
			1.25±0.10	D	
	3.20±0.20	1.60±0.20	1.15±0.15	J	
			1.60±0.20	G	
	3.20+0.30/-0.10	1.60+0.30/-0.10	1.60+0.30/-0.10	P	
1210 (3225)	3.20±0.30	2.50±0.20	0.95±0.10	C	0.75±0.25
			1.25±0.10	D	
	3.20±0.40	2.50±0.30	1.60±0.20	G	
			2.00±0.20	K	
			2.50±0.30	M	
1812 (4532)	4.50±0.40	3.20±0.30	1.25±0.10	D	0.75±0.25
			2.00±0.20	K	
	4.50±0.40	3.20±0.40	2.50±0.30	M	
			2.80±0.30	U	

Reflow soldering only is recommended.

*1 : For 0603/Cap ≥ 10μF products

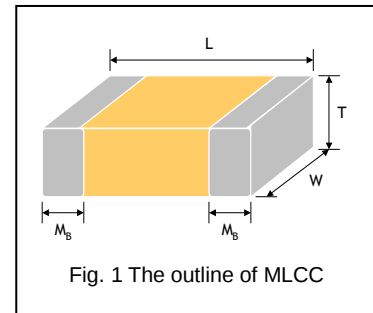

6. GENERAL ELECTRICAL DATA

Dielectric	X7R	X5R	X6S	Y5V
Size	0402, 0603, 0805, 1206, 1210, 1812			
Capacitance range*	0.56μF to 47μF	0.027μF to 100μF	0.47μF to 100μF	1μF to 100μF
Capacitance tolerance**	K (±10%), M (±20%)			Z (-20/+80%)
Rated voltage (WVDC)	6.3V, 10V, 16V, 25V, 50V, 100V			
DF(Tan δ)*	Note 1			
Operating temperature	-55 to +125°C	-55 to +85°C	-55 to +105°C	-25 to +85°C
Capacitance characteristic	±15%		±22%	+30/-80%
Termination	Ni/Sn (lead-free termination)			

* Measured at 1.0±0.2Vrms, 1.0kHz±10% for C≤10μF; 0.5±0.2Vrms, 120Hz±20% for C>10μF, 30~70% related humidity, 25°C ambient temperature for X7R, X5R and at 20°C for Y5V.

** Preconditioning for Class II MLCC: Perform a heat treatment at 150±10°C for 1 hour, then leave in ambient condition for 24±2 hours before measurement.

Note 1:

X7R/X5R/X6S

Rated vol.	D.F. ≤	Exception of D.F. ≤
≥100V	≤2.5%	≤3% 1206 ≥ 0.47μF
		≤5% 0805 ≥ 0.1μF; 0603 ≥ 0.068μF
50V	≤2.5%	≤3% 0201(50V); 0603 ≥ 0.047μF; 0805 ≥ 0.18μF; 1206 ≥ 0.47μF
		≤5% 1210 ≥ 4.7μF
		≤10% 0402 ≥ 0.1μF; 0603 ≥ 1μF; 0805 ≥ 1μF; 1206 ≥ 2.2μF; 1210 ≥ 10μF; TT series
35V	≤3.5%	≤10% 0603 ≥ 1μF; 0805 ≥ 2.2μF; 1210 ≥ 10μF
		≤5% 0201 ≥ 0.01μF; 0805 ≥ 1μF; 1210 ≥ 10μF
		≤7% 0603 ≥ 0.33μF; 1206 ≥ 4.7μF
25V	≤3.5%	≤10% 0402 ≥ 0.10μF; 0603 ≥ 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 6.8μF; 1210 ≥ 22μF; TT series
		≤12.5% 0402 ≥ 1μF
16V	≤3.5%	≤5% 0201 ≥ 0.01μF; 0402 ≥ 0.033μF; 0603 ≥ 0.15μF; 0805 ≥ 0.68μF; 1206 ≥ 2.2μF; 1210 ≥ 4.7μF
		≤10% 0201 ≥ 0.1μF; 0402 ≥ 0.22μF; 0603 ≥ 0.68μF; 0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF; TT series
10V	≤5%	≤10% 0201 ≥ 0.012μF; 0402 ≥ 0.33μF; 0603 ≥ 0.33μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF; 1210 ≥ 22μF; TT series
		≤15% 0201 ≥ 0.1μF; 0402 ≥ 1μF
6.3V	≤10%	≤15% 0201 ≥ 0.1μF; 0402 ≥ 1μF; 0603 ≥ 10μF; 0805 ≥ 4.7μF; 1206 ≥ 47μF; 1210 ≥ 100μF; TT series
		≤20% 0402 ≥ 2.2μF
4V	≤15%	---

Y5V

Rated vol.	D.F. ≤	Exception of D.F. ≤
≥50V	5%	7% 0603 ≥ 0.1μF; 0805 ≥ 0.47μF; 1206 ≥ 4.7μF
35V	7%	---
25V	5%	7% 0402 ≥ 0.047μF; 0603 ≥ 0.1μF; 0805 ≥ 0.33μF; 1206 ≥ 1μF; 1210 ≥ 4.7μF
		9% 0402 ≥ 0.068μF; 0603 ≥ 0.47μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF
16V (C<1.0μF)	7%	9% 0402 ≥ 0.068μF; 0603 ≥ 0.68μF
		12.5% 0402 ≥ 0.22μF
16V (C ≥ 1.0μF)	9%	12.5% 0603 ≥ 2.2μF; 0805 ≥ 3.3μF; 1206 ≥ 10μF; 1210 ≥ 22μF; 1812 ≥ 47μF
10V	12.5%	20% 0402 ≥ 0.47μF
6.3V	20%	---

7. CAPACITANCE RANGE

7-1 X7R Dielectric

DIELECTRIC		X7R																
SIZE		0603					0805					1206						
Rated Voltage (VDC)		6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50	100	
Capacitance	0.56μF (564)	X	X	X														
	0.68μF (684)	X	X	X														
	0.82μF (824)	X	X	X														
	1.0μF (105)	X	X	X	X	X		D	D	D	I		J	J	J	P	P	
	1.5μF (155)							I	I	I	I	J	J	J	P			
	2.2μF (225)		X				I	I	I	I	I	J	J	J	P	P		
	3.3μF (335)											P	P	P	P			
	4.7μF (475)						I	I	I	I		P	P	P	P	P		
	6.8μF (685)																	
	10μF (106)						I	I	I			P	P	P	P			
	22μF (226)											P	P					
	47μF (476)																	

The letter in cell is expressed the symbol of product thickness.

DIELECTRIC		X7R										
SIZE		1210					1812					
Rated Voltage (VDC)		10	16	25	35	50	100	10	16	25	50	100
Capacitance	0.56μF (564)											
	0.68μF (684)											
	0.82μF (824)											
	1.0μF (105)	D	D	D		D	K	D	D	D	K	K
	1.5μF (155)						M					K
	2.2μF (225)		K	G			M				M	M
	3.3μF (335)			G								
	4.7μF (475)	K	K	K		M						
	6.8μF (685)											
	10μF (106)	K	K	K	M	M						
	22μF (226)	M	M	M								
	47μF (476)	M										

The letter in cell is expressed the symbol of product thickness.

7-2 X5R Dielectric

Dielectric		X5R																											
Size		0402					0603					0805					1206					1210							
Rated Voltage (VDC)		6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50	4	6.3	10	16	25	50		
Capacitance	0.027μF (273)			N																									
	0.033μF (333)			N																									
	0.039μF (393)			N																									
	0.047μF (473)			N																									
	0.056μF (563)		N	N																									
	0.068μF (683)		N	N																									
	0.082μF (823)	N	N	N																									
	0.10μF (104)	N	N	N	N	N																							
	0.15μF (154)	N	N	N	N																								
	0.22μF (224)	N	N	N	N	N			X	X																			
	0.27μF (274)							X	X	X																			
	0.33μF (334)	N	N				X	X	X	X																			
	0.39μF (394)							X	X	X																			
	0.47μF (474)	N	N		E	E		X	X	X	X																		
	0.68μF (684)	N	N				X	X	X	X																			
	0.82μF (824)						X	X	X																				
	1.0μF (105)	N	N	N	N		X	X	X	X	X		D	D	D	I													
	1.5μF (155)						X					I	I	I	I		J	J					K	K					
	2.2μF (225)	N	N	E			X	X	X	X		I	I	I	I	I	J	J	P				K	K					
	3.3μF (335)						X	X				I	I	I	I		P	P	P										
	4.7μF (475)	E	E				X	X	X			I	I	I	I	I	P	P	P	P	P			K	K	K			
	6.8μF (685)																P	P											
	10μF (106)	E					X	X	X			I	I	I	I		P	P	P	P			K	K	K	K	M		
	22μF (226)						X					I	I	I			P	P	P	P			M	M	M	M			
	47μF (476)											I					P	P					M	M	M				
	100μF (107)																P						M	M					
	220μF (227)																												

The letter in cell is expressed the symbol of product thickness.

7-3 X6S Dielectric

Dielectric		X6S																												
Size		0402				0603					0805					1206					1210									
Rated Voltage (VDC)		6.3	10	16	25	4	6.3	10	25	50	4	6.3	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50	6.3	10	16	25	50
Capacitance	0.10μF (104)																													
	0.15μF (154)																													
	0.22μF (224)																													
	0.33μF (334)																													
	0.47μF (474)	N																												
	0.68μF (684)																													
	1.0μF (105)	N																												
	1.5μF (155)																													
	2.2μF (225)	N	E																											
	3.3μF (335)																													
	4.7μF (475)						X							I																
	6.8uF (685)																													
	10μF (106)						X	X				I	I							G										
	22μF (226)					X						I					P	P	P											
	47μF (476)															P														
100μF (107)																				M										

The letter in cell is expressed the symbol of product thickness.

7-4 Y5V Dielectric

DIELECTRIC		Y5V										
SIZE		0402		0603				0805				
RATED VOLTAGE (VDC)		63	10	63	10	16	25	6.3	10	16	25	50
Capacitance	1.0μF (105)	N	N		S	X	X		B	B	D	D
	1.5μF (155)				S				D	D		
	2.2μF (225)			S	S	X			D	D	I	
	3.3μF (335)								D	D		
	4.7μF (475)			X	X				D	D	I	
	6.8μF (685)								I			
	10μF (106)							I	I	I		
	22μF (226)							I	I			

DIELECTRIC		Y5V																
SIZE		1206					1210					1812						
RATED VOLTAGE (VDC)		6.3	10	16	25	35	50	6.3	10	16	25	35	50	10	16	25	50	100
Capacitance	1.0μF (105)		C	C	C		C		C	C	C		C	D	D	D	D	D
	1.5μF (155)		C	C	C				C	C	C			D	D	D	D	
	2.2μF (225)		C	C	C		J		C	C	C		G	D	D	D	D	
	3.3μF (335)		J	J	J				C	C	C			D	D	D	D	
	4.7μF (475)		J	J	J	J	P		C	C	D		G	D	D	D	D	
	6.8μF (685)		J	J					C	C	D			D	D	D	D	
	10μF (106)		J	J	P				D	D	G	K		D	D	D	K	
	22μF (226)		P	P					K	K								
	47μF (476)	P						K	K						M			
100μF (107)							M											

The letter in cell is expressed the symbol of product thickness.

8. PACKAGING STYLE AND QUANTITY

Size	Thickness (mm)/Symbol		Paper tape		Plastic tape	
			7" reel	13" reel	7" reel	13" reel
0402 (1005)	0.50±0.05	N	10k	50k	-	-
	0.50±0.20	E	10k	-	-	-
0603 (1608)	0.80±0.07	S	4k	15k	-	-
	0.80±0.20	X	4k	15k	-	-
0805 (2012)	0.80±0.10	B	4k	15k	-	-
	1.25±0.10	D	-	-	3k	10k
	1.25±0.20	I	-	-	3k	10k
1206 (3216)	0.95±0.10	C	-	-	3k	10k
	1.15±0.15	J	-	-	3k	10K
	1.25±0.10	D	-	-	3k	10k
	1.60±0.20	G	-	-	2k	10k
	1.60+0.30/-0.10	P	-	-	2k	9k
1210 (3225)	0.95±0.10	C	-	-	3k	10k
	1.25±0.10	D	-	-	3k	10k
	1.60±0.20	G	-	-	2k	-
	2.00±0.20	K	-	-	1k	6k
	2.50±0.30	M	-	-	1k	6k
1812 (4532)	1.25±0.10	D	-	-	1k	5k
	2.00±0.20	K	-	-	1k	-
	2.50±0.30	M	-	-	0.5k	3k
	2.80±0.30	U	-	-	0.5k	-

Unit: pieces

9. RELIABILITY TEST CONDITIONS AND REQUIREMENTS

No.	Item	Test Condition	Requirements																																																													
1.	Visual and Mechanical	---	* No remarkable defect. * Dimensions to conform to individual specification sheet.																																																													
2.	Capacitance	Class I: NP0 Cap≤1000pF 1.0±0.2Vrms, 1MHz±10% Cap>1000pF 1.0±0.2Vrms, 1KHz±10%	* Shall not exceed the limits given in the detailed spec.																																																													
3.	Q/ D.F. (Dissipation Factor)	Class II: X7R, X5R, X6S,Y5V Cap≤10μF, 1.0±0.2Vrms, 1kHz±10% ** Cap>10μF, 0.5±0.2Vrms, 120Hz±20%	NP0: Cap≥30pF, Q≥1000; Cap<30pF,Q≥400+20C X7R,X5R,X6S:																																																													
		<table><tr><th>Rated v</th><th>D.F. ≤</th><th colspan="2">Exception of D.F. ≤</th></tr><tr><td rowspan="2">≥ 100V</td><td rowspan="2">≤ 2.5%</td><td>≤3%</td><td>1206 ≥ 0.47μF</td></tr><tr><td>≤5%</td><td>0805 > 0.1μF, 0603 ≥ 0.068μF</td></tr><tr><td rowspan="2">50V</td><td rowspan="2">≤ 2.5%</td><td>≤3%</td><td>0201(50V); 0603 ≥ 0.047μF; 0805 ≥ 0.18μF;1206 ≥ 0.47μF</td></tr><tr><td>≤5%</td><td>1210 ≥ 4.7μF</td></tr><tr><td rowspan="2"></td><td rowspan="2"></td><td>≤10%</td><td>0402 ≥ 0.1μF ;0603 ≥ 1μF;0805 ≥ 1μF;1206 ≥ 2.2μF; 1210 ≥ 10μF; TT series</td></tr><tr><td></td><td></td></tr><tr><td>35V</td><td>≤ 3.5%</td><td>≤10%</td><td>0603 ≥ 1μF;0805≥2.2μF; 1210 ≥ 10μF</td></tr><tr><td rowspan="4">25V</td><td rowspan="4"></td><td>≤5%</td><td>0201 ≥ 0.01μF;0805 ≥ 1μF; 1210 ≥ 10μF</td></tr><tr><td></td><td></td></tr><tr><td>≤7%</td><td>0603 ≥ 0.33μF; 1206 ≥ 4.7μF</td></tr><tr><td>≤10%</td><td>0402 ≥ 0.10μF;0603 ≥ 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 6.8μF ; 1210 ≥ 22μF ; TT series</td></tr><tr><td></td><td></td><td>≤12.5%</td><td>0402 ≥ 1μF</td></tr><tr><td rowspan="2">16V</td><td rowspan="2">≤ 3.5%</td><td>≤5%</td><td>0201 ≥ 0.01μF;0402 ≥ 0.033μF; 0603 ≥ 0.15μF; 0805 ≥ 0.68μF; 1206 ≥ 2.2μF;1210 ≥ 4.7μF</td></tr><tr><td>≤10%</td><td>0201 ≥ 0.1μF;0402 ≥ 0.22μF; 0603 ≥ 0.68μF;0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF; TT series</td></tr><tr><td rowspan="2">10V</td><td rowspan="2">≤ 5%</td><td>≤10%</td><td>0201 ≥ 0.012μF;0402 ≥ 0.33μF;0603 ≥ 0.33μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF;1210 ≥ 22μF; TT series</td></tr><tr><td>≤15%</td><td>0201 ≥ 0.1μF; 0402 ≥ 1μF</td></tr><tr><td rowspan="2">6.3V</td><td rowspan="2">≤ 10%</td><td>≤15%</td><td>0201 ≥ 0.1μF;0402 ≥ 1μF;0603 ≥ 10μF; 0805 ≥ 4.7μF; 1206 ≥ 47μF ;1210 ≥ 100μF; TT series</td></tr><tr><td>≤20%</td><td>0402 ≥ 2.2μF</td></tr><tr><td>4V</td><td>≤ 15%</td><td>---</td><td>---</td></tr></table>	Rated v	D.F. ≤	Exception of D.F. ≤		≥ 100V	≤ 2.5%	≤3%	1206 ≥ 0.47μF	≤5%	0805 > 0.1μF, 0603 ≥ 0.068μF	50V	≤ 2.5%	≤3%	0201(50V); 0603 ≥ 0.047μF; 0805 ≥ 0.18μF;1206 ≥ 0.47μF	≤5%	1210 ≥ 4.7μF			≤10%	0402 ≥ 0.1μF ;0603 ≥ 1μF;0805 ≥ 1μF;1206 ≥ 2.2μF; 1210 ≥ 10μF; TT series			35V	≤ 3.5%	≤10%	0603 ≥ 1μF;0805≥2.2μF; 1210 ≥ 10μF	25V		≤5%	0201 ≥ 0.01μF;0805 ≥ 1μF; 1210 ≥ 10μF			≤7%	0603 ≥ 0.33μF; 1206 ≥ 4.7μF	≤10%	0402 ≥ 0.10μF;0603 ≥ 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 6.8μF ; 1210 ≥ 22μF ; TT series			≤12.5%	0402 ≥ 1μF	16V	≤ 3.5%	≤5%	0201 ≥ 0.01μF;0402 ≥ 0.033μF; 0603 ≥ 0.15μF; 0805 ≥ 0.68μF; 1206 ≥ 2.2μF;1210 ≥ 4.7μF	≤10%	0201 ≥ 0.1μF;0402 ≥ 0.22μF; 0603 ≥ 0.68μF;0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF; TT series	10V	≤ 5%	≤10%	0201 ≥ 0.012μF;0402 ≥ 0.33μF;0603 ≥ 0.33μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF;1210 ≥ 22μF; TT series	≤15%	0201 ≥ 0.1μF; 0402 ≥ 1μF	6.3V	≤ 10%	≤15%	0201 ≥ 0.1μF;0402 ≥ 1μF;0603 ≥ 10μF; 0805 ≥ 4.7μF; 1206 ≥ 47μF ;1210 ≥ 100μF; TT series	≤20%	0402 ≥ 2.2μF	4V	≤ 15%	---	---
		Rated v	D.F. ≤	Exception of D.F. ≤																																																												
		≥ 100V	≤ 2.5%	≤3%	1206 ≥ 0.47μF																																																											
				≤5%	0805 > 0.1μF, 0603 ≥ 0.068μF																																																											
		50V	≤ 2.5%	≤3%	0201(50V); 0603 ≥ 0.047μF; 0805 ≥ 0.18μF;1206 ≥ 0.47μF																																																											
				≤5%	1210 ≥ 4.7μF																																																											
				≤10%	0402 ≥ 0.1μF ;0603 ≥ 1μF;0805 ≥ 1μF;1206 ≥ 2.2μF; 1210 ≥ 10μF; TT series																																																											
		35V	≤ 3.5%	≤10%	0603 ≥ 1μF;0805≥2.2μF; 1210 ≥ 10μF																																																											
		25V		≤5%	0201 ≥ 0.01μF;0805 ≥ 1μF; 1210 ≥ 10μF																																																											
				≤7%	0603 ≥ 0.33μF; 1206 ≥ 4.7μF																																																											
				≤10%	0402 ≥ 0.10μF;0603 ≥ 0.47μF; 0805 ≥ 2.2μF; 1206 ≥ 6.8μF ; 1210 ≥ 22μF ; TT series																																																											
				≤12.5%	0402 ≥ 1μF																																																											
		16V	≤ 3.5%	≤5%	0201 ≥ 0.01μF;0402 ≥ 0.033μF; 0603 ≥ 0.15μF; 0805 ≥ 0.68μF; 1206 ≥ 2.2μF;1210 ≥ 4.7μF																																																											
				≤10%	0201 ≥ 0.1μF;0402 ≥ 0.22μF; 0603 ≥ 0.68μF;0805 ≥ 2.2μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF; TT series																																																											
		10V	≤ 5%	≤10%	0201 ≥ 0.012μF;0402 ≥ 0.33μF;0603 ≥ 0.33μF; 0805 ≥ 2.2μF; 1206 ≥ 2.2μF;1210 ≥ 22μF; TT series																																																											
				≤15%	0201 ≥ 0.1μF; 0402 ≥ 1μF																																																											
		6.3V	≤ 10%	≤15%	0201 ≥ 0.1μF;0402 ≥ 1μF;0603 ≥ 10μF; 0805 ≥ 4.7μF; 1206 ≥ 47μF ;1210 ≥ 100μF; TT series																																																											
				≤20%	0402 ≥ 2.2μF																																																											
		4V	≤ 15%	---	---																																																											
				Y5V:																																																												
				<table><tr><th>Rated vol.</th><th>D.F. ≤</th><th colspan="2">Exception of D.F. ≤</th></tr><tr><td>≥ 50V</td><td>5%</td><td>7%</td><td>0603 ≥ 0.1μF; 0805 ≥ 0.47μF; 1206 ≥ 4.7μF</td></tr><tr><td>35V</td><td>7%</td><td>---</td><td>---</td></tr><tr><td rowspan="2">25V</td><td rowspan="2">5%</td><td>7%</td><td>0402 ≥ 0.047μF;0603 ≥ 0.1μF; 0805 ≥ 0.33μF;1206 ≥ 1μF;1210 ≥ 4.7μF</td></tr><tr><td>9%</td><td>0402 ≥ 0.068μF;0603 ≥ 0.47μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF</td></tr><tr><td>16V (C<1.0μF)</td><td>7%</td><td>9%</td><td>0402 ≥ 0.068μF; 0603 ≥ 0.68μF</td></tr><tr><td></td><td></td><td>12.5%</td><td>0402 ≥ 0.22μF</td></tr><tr><td>16V (C ≥ 1.0μF)</td><td>9%</td><td>12.5%</td><td>0603 ≥ 2.2μF; 0805 ≥ 3.3μF; 1206 ≥ 10μF; 1210 ≥ 22μF;1812 ≥ 47μF</td></tr><tr><td>10V</td><td>12.5%</td><td>20%</td><td>0402 ≥ 0.47μF</td></tr><tr><td>6.3V</td><td>20%</td><td>---</td><td>---</td></tr></table>	Rated vol.	D.F. ≤	Exception of D.F. ≤		≥ 50V	5%	7%	0603 ≥ 0.1μF; 0805 ≥ 0.47μF; 1206 ≥ 4.7μF	35V	7%	---	---	25V	5%	7%	0402 ≥ 0.047μF;0603 ≥ 0.1μF; 0805 ≥ 0.33μF;1206 ≥ 1μF;1210 ≥ 4.7μF	9%	0402 ≥ 0.068μF;0603 ≥ 0.47μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF	16V (C<1.0μF)	7%	9%	0402 ≥ 0.068μF; 0603 ≥ 0.68μF			12.5%	0402 ≥ 0.22μF	16V (C ≥ 1.0μF)	9%	12.5%	0603 ≥ 2.2μF; 0805 ≥ 3.3μF; 1206 ≥ 10μF; 1210 ≥ 22μF;1812 ≥ 47μF	10V	12.5%	20%	0402 ≥ 0.47μF	6.3V	20%	---	---																						
		Rated vol.	D.F. ≤	Exception of D.F. ≤																																																												
≥ 50V	5%	7%	0603 ≥ 0.1μF; 0805 ≥ 0.47μF; 1206 ≥ 4.7μF																																																													
35V	7%	---	---																																																													
25V	5%	7%	0402 ≥ 0.047μF;0603 ≥ 0.1μF; 0805 ≥ 0.33μF;1206 ≥ 1μF;1210 ≥ 4.7μF																																																													
		9%	0402 ≥ 0.068μF;0603 ≥ 0.47μF; 1206 ≥ 4.7μF; 1210 ≥ 22μF																																																													
16V (C<1.0μF)	7%	9%	0402 ≥ 0.068μF; 0603 ≥ 0.68μF																																																													
		12.5%	0402 ≥ 0.22μF																																																													
16V (C ≥ 1.0μF)	9%	12.5%	0603 ≥ 2.2μF; 0805 ≥ 3.3μF; 1206 ≥ 10μF; 1210 ≥ 22μF;1812 ≥ 47μF																																																													
10V	12.5%	20%	0402 ≥ 0.47μF																																																													
6.3V	20%	---	---																																																													
4.	Dielectric Strength	* To apply voltage (≤100V) 250%. * Duration: 1 to 5 sec. * Charge and discharge current less than 50mA.	* No evidence of damage or flash over during test.																																																													
5.	Insulation Resistance	To apply rated voltage for max. 120 sec.	10GΩ or RxC ≥ 500Ω·F whichever is smaller. Class II (X7R, X5R, X6S, Y5V)																																																													
		<table><tr><th>Rated voltage</th><th>Insulation Resistance</th></tr><tr><td>100V: X7R</td><td rowspan="6">10GΩ or RxC ≥ 100 Ω·F whichever is smaller.</td></tr><tr><td>50V:0603≥1μF;0805≥1μF;1206≥4.7μF;1210≥4.7μF</td></tr><tr><td>35V:0805≥2.2μF;1210 ≥ 10μF</td></tr><tr><td>25V:0402≥1μF;0603≥2.2μF;0805≥2.2μF;1206≥10μF;1210≥10μF</td></tr><tr><td>16V:0402≥0.22μF;0603≥1μF;0805≥2.2μF;1206≥10μF;1210≥47μF</td></tr><tr><td>10V:0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF; 1206≥4.7μF;1210≥47μF</td></tr><tr><td>6.3V ; 4V</td><td rowspan="4">10GΩ or RxC ≥ 50 Ω·F whichever is smaller.</td></tr><tr><td>50V: 0402≥0.1μF</td></tr><tr><td>35V:0603≥1μF</td></tr><tr><td>10V:0603≥10μF</td></tr><tr><td>4V:0603≥22μF; 0805≥47μF</td><td></td></tr></table>	Rated voltage	Insulation Resistance	100V: X7R	10GΩ or RxC ≥ 100 Ω·F whichever is smaller.	50V:0603≥1μF;0805≥1μF;1206≥4.7μF;1210≥4.7μF	35V:0805≥2.2μF;1210 ≥ 10μF	25V:0402≥1μF;0603≥2.2μF;0805≥2.2μF;1206≥10μF;1210≥10μF	16V:0402≥0.22μF;0603≥1μF;0805≥2.2μF;1206≥10μF;1210≥47μF	10V:0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF; 1206≥4.7μF;1210≥47μF	6.3V ; 4V	10GΩ or RxC ≥ 50 Ω·F whichever is smaller.	50V: 0402≥0.1μF	35V:0603≥1μF	10V:0603≥10μF	4V:0603≥22μF; 0805≥47μF																																															
		Rated voltage	Insulation Resistance																																																													
		100V: X7R	10GΩ or RxC ≥ 100 Ω·F whichever is smaller.																																																													
		50V:0603≥1μF;0805≥1μF;1206≥4.7μF;1210≥4.7μF																																																														
		35V:0805≥2.2μF;1210 ≥ 10μF																																																														
		25V:0402≥1μF;0603≥2.2μF;0805≥2.2μF;1206≥10μF;1210≥10μF																																																														
		16V:0402≥0.22μF;0603≥1μF;0805≥2.2μF;1206≥10μF;1210≥47μF																																																														
		10V:0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF; 1206≥4.7μF;1210≥47μF																																																														
		6.3V ; 4V	10GΩ or RxC ≥ 50 Ω·F whichever is smaller.																																																													
50V: 0402≥0.1μF																																																																
35V:0603≥1μF																																																																
10V:0603≥10μF																																																																
4V:0603≥22μF; 0805≥47μF																																																																

No.	Item	Test Condition	Requirements																								
6.	Temperature Coefficient	With no electrical load.																									
		<table><tr><th>T.C.</th><th>Operating Temp</th></tr><tr><td>NPO</td><td>-55~125°C at 25°C</td></tr><tr><td>X7R</td><td>-55~125°C at 25°C</td></tr><tr><td>X5R</td><td>-55~ 85°C at 25°C</td></tr><tr><td>X6S</td><td>-55~105°C at 25°C</td></tr><tr><td>Y5V</td><td>-25~ 85°C at 20°C</td></tr></table>	T.C.	Operating Temp	NPO	-55~125°C at 25°C	X7R	-55~125°C at 25°C	X5R	-55~ 85°C at 25°C	X6S	-55~105°C at 25°C	Y5V	-25~ 85°C at 20°C	<table><tr><th>T.C.</th><th>Capacitance Change</th></tr><tr><td>NPO</td><td>Within ±30ppm/°C</td></tr><tr><td>X7R</td><td>Within ±15%</td></tr><tr><td>X5R</td><td>Within ±15%</td></tr><tr><td>X6S</td><td>Within ±22%</td></tr><tr><td>Y5V</td><td>Within +30%/-80%</td></tr></table>	T.C.	Capacitance Change	NPO	Within ±30ppm/°C	X7R	Within ±15%	X5R	Within ±15%	X6S	Within ±22%	Y5V	Within +30%/-80%
		T.C.	Operating Temp																								
		NPO	-55~125°C at 25°C																								
		X7R	-55~125°C at 25°C																								
		X5R	-55~ 85°C at 25°C																								
		X6S	-55~105°C at 25°C																								
		Y5V	-25~ 85°C at 20°C																								
T.C.	Capacitance Change																										
NPO	Within ±30ppm/°C																										
X7R	Within ±15%																										
X5R	Within ±15%																										
X6S	Within ±22%																										
Y5V	Within +30%/-80%																										
7.	Adhesive Strength of Termination	* Pressurizing force : 5N (≤0603) and 10N (>0603)	* No remarkable damage or removal of the terminations.																								
		* Test time: 10±1 sec.																									
8.	Vibration Resistance	* Vibration frequency: 10~55 Hz/min.	* No remarkable damage. * Cap change and Q/D.F.: To meet initial spec.																								
		* Total amplitude: 1.5mm																									
		* Test time: 6 hrs. (Two hrs each in three mutually perpendicular directions.)																									
		* Measurement to be made after keeping at room temp. for 24±2 hrs.																									
9.	Solderability	* Solder temperature: 235±5°C	95% min. coverage of all metalized area.																								
		* Dipping time: 2±0.5 sec.																									
10.	Bending Test	* The middle part of substrate shall be pressurized by means of the pressurizing rod at a rate of about 1 mm per second until the deflection becomes 1 mm and then the pressure shall be maintained for 5±1 sec.	* No remarkable damage. * Cap change : NPO: within ±5% or 0.5pF whichever is larger X7R, X5R, X6S: within ±12.5% Y5V: within ±30% (This capacitance change means the change of capacitance under specified flexure of substrate from the capacitance measured before the test.)																								
		* Measurement to be made after keeping at room temp. for 24±2 hrs.																									
11.	Resistance to Soldering Heat	* Solder temperature: 260±5°C	* No remarkable damage. * Cap change: NPO: within ±2.5% or 0.25pF whichever is larger X7R, X5R, X6S: within ±7.5% Y5V: within ±20% * Q/D.F., I.R. and dielectric strength: To meet initial requirements. * 25% max. leaching on each edge.																								
		* Dipping time: 10±1 sec																									
		* Preheating: 120 to 150°C for 1 minute before immerse the capacitor in a eutectic solder.																									
		* Before initial measurement (Class II only): Perform 150+0/-10°C for 1 hr and then set for 24±2 hrs at room temp.																									
		* Measurement to be made after keeping at room temp. for 24±2 hrs.																									
12.	Temperature Cycle	* Conduct the five cycles according to the temperatures and time.	* No remarkable damage. * Cap change : NPO: within ±2.5% or 0.25pF whichever is larger X7R, X5R, X6S: within ±7.5% Y5V: within ±20% * Q/D.F., I.R. and dielectric strength: To meet initial requirements.																								
		<table><tr><th>Step</th><th>Temp. (°C)</th><th>Time (min.)</th></tr><tr><td>1</td><td>Min. operating temp. +0/-3</td><td>30±3</td></tr><tr><td>2</td><td>Room temp.</td><td>2~3</td></tr><tr><td>3</td><td>Max. operating temp. +3/-0</td><td>30±3</td></tr><tr><td>4</td><td>Room temp.</td><td>2~3</td></tr></table>		Step	Temp. (°C)	Time (min.)	1	Min. operating temp. +0/-3	30±3	2	Room temp.	2~3	3	Max. operating temp. +3/-0	30±3	4	Room temp.	2~3									
		Step		Temp. (°C)	Time (min.)																						
		1		Min. operating temp. +0/-3	30±3																						
		2		Room temp.	2~3																						
		3		Max. operating temp. +3/-0	30±3																						
		4		Room temp.	2~3																						



No.	Item	Test Condition	Requirements		
13.	Humidity (Damp Heat) Steady State	* Test temp.: 40±2°C	* No remarkable damage.		
		* Humidity: 90~95% RH	* Cap change:		
		* Test time: 500+24/-0hrs.	NP0: within ±5% or 0.5pF whichever is larger		
		*Before initial measurement (Class II only): Perform 150+0/-10°C for 1 hr and then set for 24±2 hrs at room temp.	X7R, X5R, X6S: ≥10V**, within ±12.5%; ≤6.3V within ±25%; TT series & C≥ 1uF, within ±25%		
		* Measurement to be made after keeping at room temp. for 24±2 hrs.	**10V: 0603 ≥4.7μF; 0402 ≥1μF; 0201 ≥0.1μF, within ±25%; Y5V: ≥10V, within ±30%; ≤6.3V, within +30/-40%		
		* Q/D.F. value:			
		NP0: More than 30pF Q≥350, 10pF≤C≤30pF, Q≥275+2.5C			
		Less than 10pF Q≥200+10C			
		X7R, X5R, X6S:			
		Rated	D.F. ≤	Exception of D.F. ≤	
		≥100V	≤3%	≤6% 1206 ≥0.47μF	
				≤7.5% 0805 ≥0.1μF, 0603 ≥0.068μF	
		≥50V	≤3%	≤6% 0201(50V); 0603 ≥0.047μF; 0805 ≥0.18μF; 1206 ≥0.47μF	
		≤10% 1210 ≥4.7μF			
	≤20%	0402 ≥0.1μF; 0603 ≥1μF; 0805 ≥1μF; 1206 ≥2.2μF; 1210 ≥10μF; TT series			
35V	≤5%	≤20% 0603 ≥1μF; 0805 ≥2.2μF; 1210 ≥10μF			
		≤10% 0201 ≥0.01μF; 0805 ≥1μF; 1210 ≥10μF			
		≤14% 0603 ≥0.33μF; 1206 ≥4.7μF			
25V	≤5%	≤15% 0402 ≥0.10μF; 0603 ≥0.47μF; 0805 ≥2.2μF; 1206 ≥6.8μF; 1210 ≥22μF; TT series			
		≤20% 0402 ≥1μF			
		≤10% 0603 ≥0.15μF; 0805 ≥0.68μF; 1206 ≥2.2μF; 1210 ≥4.7μF			
16V	≤5%	≤15% 0201 ≥0.01μF; 0402 ≥0.033μF; 0603 ≥0.68μF; 0805 ≥2.2μF; 1206 ≥4.7μF; 1210 ≥22μF; TT series			
10V	≤7.5%	≤15% 0201 ≥0.012μF; 0402 ≥0.33μF; 0603 ≥0.33μF; 0805 ≥2.2μF; 1206 ≥2.2μF; 1210 ≥22μF			
		≤20% 0201 ≥0.1μF ; 0402 ≥1μF; TT series			
6.3V	≤15%	≤30% 0201 ≥0.1μF; 0402 ≥1μF; 0603 ≥10μF; 0805 ≥4.7μF; 1206 ≥47μF; 1210 ≥100μF; TT series			
4V	≤20%	---	---		

No	Item	Test Condition	Requirements																																																																			
14	Humidity (Damp Heat) Load	* Test temp.: 40±2°C	* No remarkable damage.																																																																			
		* Humidity: 90~95%RH	Cap change:																																																																			
		* Test time: 500+24/-0 hrs.	NP0: ±7.5% or 0.75pF whichever is larger.																																																																			
		* To apply voltage : rated voltage.	X7R, X5R, X6S: ≥10V**, within ±12.5%; ≤6.3V within ±25%;																																																																			
		* Before initial measurement (Class II only): To apply test voltage for 1hr at 40°C and then set for 24±2 hrs at room temp.	TT series & C≥1uF, within ±25%																																																																			
		* Measurement to be made after keeping at room temp. for 24±2 hrs.	**10V: 0603≥4.7μF; 0402≥1μF; 0201≥0.1μF, within ±25%;																																																																			
			Y5V: ≥10V, within ±30%; ≤6.3V, within +30/-40%																																																																			
			Q/D.F. value:																																																																			
			NP0: C≥30pF, Q≥200; C<30pF, Q≥100+10/3C																																																																			
			X7R, X5R, X6S:																																																																			
		<table><tr><th>Rated</th><th>D.F. ≤</th><th colspan="2">Exception of D.F. ≤</th></tr><tr><td>≥100V</td><td>≤3%</td><td>≤6%</td><td>1206 ≥0.47μF</td></tr><tr><td></td><td></td><td>≤7.5%</td><td>0805 >0.1μF, 0603 ≥0.068μF</td></tr><tr><td>≥50V</td><td>≤3%</td><td>≤6%</td><td>0201(50V); 0603 ≥0.047μF; 0805 ≥0.18μF; 1206 ≥0.47μF</td></tr><tr><td></td><td></td><td>≤10%</td><td>1210 ≥4.7μF</td></tr><tr><td></td><td></td><td>≤20%</td><td>0402 ≥0.1μF; 0603 ≥1μF; 0805 ≥1μF; 1206 ≥2.2μF; 1210 ≥10μF; TT series</td></tr><tr><td>35V</td><td>≤5%</td><td>≤20%</td><td>0603 ≥1μF; 0805 ≥2.2μF; 1210 ≥10μF</td></tr><tr><td>25V</td><td>≤5%</td><td>≤10%</td><td>0201 ≥0.01μF; 0805 ≥1μF; 1210 ≥10μF</td></tr><tr><td></td><td></td><td>≤14%</td><td>0603 ≥0.33μF; 1206 ≥4.7μF</td></tr><tr><td></td><td></td><td>≤15%</td><td>0402 ≥0.10μF; 0603 ≥0.47μF; 0805 ≥2.2μF; 1206 ≥6.8μF; 1210 ≥22μF; TT series</td></tr><tr><td></td><td></td><td>≤20%</td><td>0402 ≥1μF</td></tr><tr><td>16V</td><td>≤5%</td><td>≤10%</td><td>0603 ≥0.15μF; 0805 ≥0.68μF; 1206 ≥2.2μF; 1210 ≥4.7μF</td></tr><tr><td></td><td></td><td>≤15%</td><td>0201 ≥0.01μF; 0402 ≥0.033μF; 0603 ≥0.68μF; 0805 ≥2.2μF; 1206 ≥4.7μF; 1210 ≥22μF; TT series</td></tr><tr><td>10V</td><td>≤7.5%</td><td>≤15%</td><td>0201 ≥0.012μF; 0402 ≥0.33μF; 0603 ≥0.33μF; 0805 ≥2.2μF; 1206 ≥2.2μF; 1210 ≥22μF</td></tr><tr><td></td><td></td><td>≤20%</td><td>0201 ≥0.1μF ; 0402 ≥1μF; TT series</td></tr><tr><td>6.3V</td><td>≤15%</td><td>≤30%</td><td>0201 ≥0.1μF; 0402 ≥1μF; 0603 ≥10μF; 0805 ≥4.7μF; 1206 ≥47μF; 1210 ≥100μF; TT series</td></tr><tr><td>4V</td><td>≤20%</td><td>---</td><td>---</td></tr></table>	Rated	D.F. ≤	Exception of D.F. ≤		≥100V	≤3%	≤6%	1206 ≥0.47μF			≤7.5%	0805 >0.1μF, 0603 ≥0.068μF	≥50V	≤3%	≤6%	0201(50V); 0603 ≥0.047μF; 0805 ≥0.18μF; 1206 ≥0.47μF			≤10%	1210 ≥4.7μF			≤20%	0402 ≥0.1μF; 0603 ≥1μF; 0805 ≥1μF; 1206 ≥2.2μF; 1210 ≥10μF; TT series	35V	≤5%	≤20%	0603 ≥1μF; 0805 ≥2.2μF; 1210 ≥10μF	25V	≤5%	≤10%	0201 ≥0.01μF; 0805 ≥1μF; 1210 ≥10μF			≤14%	0603 ≥0.33μF; 1206 ≥4.7μF			≤15%	0402 ≥0.10μF; 0603 ≥0.47μF; 0805 ≥2.2μF; 1206 ≥6.8μF; 1210 ≥22μF; TT series			≤20%	0402 ≥1μF	16V	≤5%	≤10%	0603 ≥0.15μF; 0805 ≥0.68μF; 1206 ≥2.2μF; 1210 ≥4.7μF			≤15%	0201 ≥0.01μF; 0402 ≥0.033μF; 0603 ≥0.68μF; 0805 ≥2.2μF; 1206 ≥4.7μF; 1210 ≥22μF; TT series	10V	≤7.5%	≤15%	0201 ≥0.012μF; 0402 ≥0.33μF; 0603 ≥0.33μF; 0805 ≥2.2μF; 1206 ≥2.2μF; 1210 ≥22μF			≤20%	0201 ≥0.1μF ; 0402 ≥1μF; TT series	6.3V	≤15%	≤30%	0201 ≥0.1μF; 0402 ≥1μF; 0603 ≥10μF; 0805 ≥4.7μF; 1206 ≥47μF; 1210 ≥100μF; TT series	4V	≤20%	---	---
Rated	D.F. ≤	Exception of D.F. ≤																																																																				
≥100V	≤3%	≤6%	1206 ≥0.47μF																																																																			
		≤7.5%	0805 >0.1μF, 0603 ≥0.068μF																																																																			
≥50V	≤3%	≤6%	0201(50V); 0603 ≥0.047μF; 0805 ≥0.18μF; 1206 ≥0.47μF																																																																			
		≤10%	1210 ≥4.7μF																																																																			
		≤20%	0402 ≥0.1μF; 0603 ≥1μF; 0805 ≥1μF; 1206 ≥2.2μF; 1210 ≥10μF; TT series																																																																			
35V	≤5%	≤20%	0603 ≥1μF; 0805 ≥2.2μF; 1210 ≥10μF																																																																			
25V	≤5%	≤10%	0201 ≥0.01μF; 0805 ≥1μF; 1210 ≥10μF																																																																			
		≤14%	0603 ≥0.33μF; 1206 ≥4.7μF																																																																			
		≤15%	0402 ≥0.10μF; 0603 ≥0.47μF; 0805 ≥2.2μF; 1206 ≥6.8μF; 1210 ≥22μF; TT series																																																																			
		≤20%	0402 ≥1μF																																																																			
16V	≤5%	≤10%	0603 ≥0.15μF; 0805 ≥0.68μF; 1206 ≥2.2μF; 1210 ≥4.7μF																																																																			
		≤15%	0201 ≥0.01μF; 0402 ≥0.033μF; 0603 ≥0.68μF; 0805 ≥2.2μF; 1206 ≥4.7μF; 1210 ≥22μF; TT series																																																																			
10V	≤7.5%	≤15%	0201 ≥0.012μF; 0402 ≥0.33μF; 0603 ≥0.33μF; 0805 ≥2.2μF; 1206 ≥2.2μF; 1210 ≥22μF																																																																			
		≤20%	0201 ≥0.1μF ; 0402 ≥1μF; TT series																																																																			
6.3V	≤15%	≤30%	0201 ≥0.1μF; 0402 ≥1μF; 0603 ≥10μF; 0805 ≥4.7μF; 1206 ≥47μF; 1210 ≥100μF; TT series																																																																			
4V	≤20%	---	---																																																																			
			Y5V:																																																																			
			<table><tr><th>Rated vol.</th><th>D.F. ≤</th><th colspan="2">Exception of D.F. ≤</th></tr><tr><td>≥50V</td><td>7.5%</td><td>10%</td><td>0603 ≥0.1μF; 0805 ≥0.47μF; 1206 ≥4.7μF</td></tr><tr><td>35V</td><td>10%</td><td>---</td><td>---</td></tr><tr><td>25V</td><td>7.5%</td><td>10%</td><td>0402 ≥0.047μF; 0603 ≥0.1μF; 0805 ≥0.33μF; 1206 ≥1μF; 1210 ≥4.7μF</td></tr><tr><td></td><td></td><td>15%</td><td>0402 ≥0.068μF; 0603 ≥0.47μF; 1206 ≥4.7μF; 1210 ≥22μF</td></tr><tr><td>16V (C<1.0μF)</td><td>10%</td><td>12.5%</td><td>0402 ≥0.068μF; 0603 ≥0.68μF</td></tr><tr><td></td><td></td><td>20%</td><td>0402 ≥0.22μF</td></tr><tr><td>16V (C ≥1.0μF)</td><td>12.5%</td><td>20%</td><td>0603 ≥2.2μF; 0805 ≥3.3μF; 1206 ≥10μF; 1210 ≥22μF; 1812 ≥47μF;</td></tr><tr><td>10V</td><td>20%</td><td>30%</td><td>0402 ≥0.47μF</td></tr><tr><td>6.3V</td><td>30%</td><td>---</td><td>---</td></tr></table>	Rated vol.	D.F. ≤	Exception of D.F. ≤		≥50V	7.5%	10%	0603 ≥0.1μF; 0805 ≥0.47μF; 1206 ≥4.7μF	35V	10%	---	---	25V	7.5%	10%	0402 ≥0.047μF; 0603 ≥0.1μF; 0805 ≥0.33μF; 1206 ≥1μF; 1210 ≥4.7μF			15%	0402 ≥0.068μF; 0603 ≥0.47μF; 1206 ≥4.7μF; 1210 ≥22μF	16V (C<1.0μF)	10%	12.5%	0402 ≥0.068μF; 0603 ≥0.68μF			20%	0402 ≥0.22μF	16V (C ≥1.0μF)	12.5%	20%	0603 ≥2.2μF; 0805 ≥3.3μF; 1206 ≥10μF; 1210 ≥22μF; 1812 ≥47μF;	10V	20%	30%	0402 ≥0.47μF	6.3V	30%	---	---																											
Rated vol.	D.F. ≤	Exception of D.F. ≤																																																																				
≥50V	7.5%	10%	0603 ≥0.1μF; 0805 ≥0.47μF; 1206 ≥4.7μF																																																																			
35V	10%	---	---																																																																			
25V	7.5%	10%	0402 ≥0.047μF; 0603 ≥0.1μF; 0805 ≥0.33μF; 1206 ≥1μF; 1210 ≥4.7μF																																																																			
		15%	0402 ≥0.068μF; 0603 ≥0.47μF; 1206 ≥4.7μF; 1210 ≥22μF																																																																			
16V (C<1.0μF)	10%	12.5%	0402 ≥0.068μF; 0603 ≥0.68μF																																																																			
		20%	0402 ≥0.22μF																																																																			
16V (C ≥1.0μF)	12.5%	20%	0603 ≥2.2μF; 0805 ≥3.3μF; 1206 ≥10μF; 1210 ≥22μF; 1812 ≥47μF;																																																																			
10V	20%	30%	0402 ≥0.47μF																																																																			
6.3V	30%	---	---																																																																			
			*I.R.: ≥10V, 500MΩ or 25 Ω-F whichever is smaller. Class II (X7R, X5R, X6S, Y5V)																																																																			
			<table><tr><th>Rated voltage</th><th>Insulation Resistance</th></tr><tr><td>100V: X7R</td><td rowspan="7">500MΩ or RxC ≥5 Ω-F whichever is smaller.</td></tr><tr><td>50V: 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF</td></tr><tr><td>35V: 0805≥2.2μF; 1210 ≥10μF</td></tr><tr><td>25V: 0402≥1μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF</td></tr><tr><td>16V: 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF</td></tr><tr><td>10V: 0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF</td></tr><tr><td>6.3V ; 4V</td></tr></table>	Rated voltage	Insulation Resistance	100V: X7R	500MΩ or RxC ≥5 Ω-F whichever is smaller.	50V: 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF	35V: 0805≥2.2μF; 1210 ≥10μF	25V: 0402≥1μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF	16V: 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF	10V: 0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF	6.3V ; 4V																																																									
Rated voltage	Insulation Resistance																																																																					
100V: X7R	500MΩ or RxC ≥5 Ω-F whichever is smaller.																																																																					
50V: 0603≥1μF; 0805≥1μF; 1206≥4.7μF; 1210≥4.7μF																																																																						
35V: 0805≥2.2μF; 1210 ≥10μF																																																																						
25V: 0402≥1μF; 0603≥2.2μF; 0805≥2.2μF; 1206≥10μF; 1210≥10μF																																																																						
16V: 0402≥0.22μF; 0603≥1μF; 0805≥2.2μF; 1206≥10μF; 1210≥47μF																																																																						
10V: 0201≥47nF; 0402≥0.47μF; 0603≥0.47μF; 0805≥2.2μF; 1206≥4.7μF; 1210≥47μF																																																																						
6.3V ; 4V																																																																						


No	Item	Test Condition	Requirements																																																																																
15.	High Temperature Load (Endurance)	Test temp. : NP0, X7R/X7E: 125±3°C X6S: 105±3°C X5R, Y5V: 85±3°C Test time: 1000+24/-0 hrs. To apply voltage: (1) ≤6.3V or C≥10μF : 150% of rated voltage. (2) 10V≤Ur<500V: 200% of rated voltage. (3) 500V: 150% of rated voltage. (4) Ur≥630V: 120% of rated voltage. (5) 100% of rated voltage for below range.	* No remarkable damage. Cap change: NP0: ±3.0% or ±0.3pF whichever is larger X7R, X5R, X6S: ≥10V**, within ±12.5%; ≤6.3V within ±25%; TT series & C≥1uF, within ±25% **10V: 0603≥4.7μF;0402≥1μF;0201≥0.1μF, within ±25%; Y5V: ≥10V, within ±30%; ≤6.3V, within +30/-40% Q/D.F. value: NP0: More than 30pF, Q≥350 10pF≤C<30pF, Q≥275+2.5C Less than 10pF, Q≥200+10C X7R, X5R, X6S:																																																																																
		<table><tr><th>Size</th><th>Dielectric</th><th>Rated</th><th>Capacitance</th></tr><tr><td>0201</td><td>X5R/X7R/X6S</td><td>6.3V, 10V</td><td>C≥0.1μF</td></tr><tr><td>0402</td><td>X5R/X7R/X6S</td><td>6.3V, 10V</td><td>C≥1.0μF</td></tr><tr><td rowspan="2">0603</td><td rowspan="2">X5R/X7R/X6S</td><td>4V</td><td>C≥22μF</td></tr><tr><td>6.3V, 10V</td><td>C≥4.7μF</td></tr><tr><td rowspan="2">0805</td><td rowspan="2">X5R/X7R/X6S</td><td>35V</td><td>C≥1.0μF</td></tr><tr><td>4V</td><td>C≥47μF</td></tr><tr><td rowspan="2">1206</td><td rowspan="2">X5R/X7R/X6S</td><td>6.3V</td><td>C≥22μF</td></tr><tr><td>6.3V</td><td>C≥47μF</td></tr><tr><td>TT18</td><td>Y5V</td><td>3000V</td><td>C≥1.5pF</td></tr><tr><td>TT21</td><td>Y5V</td><td>6.3V,10</td><td>C≥2.2μF</td></tr><tr><td>TT31</td><td>Y5V</td><td>6.3V</td><td>C≥10μF</td></tr><tr><td>TT31</td><td>Y5V</td><td>6.3V</td><td>C≥22μF</td></tr></table>	Size	Dielectric	Rated	Capacitance	0201	X5R/X7R/X6S	6.3V, 10V	C≥0.1μF	0402	X5R/X7R/X6S	6.3V, 10V	C≥1.0μF	0603	X5R/X7R/X6S	4V	C≥22μF	6.3V, 10V	C≥4.7μF	0805	X5R/X7R/X6S	35V	C≥1.0μF	4V	C≥47μF	1206	X5R/X7R/X6S	6.3V	C≥22μF	6.3V	C≥47μF	TT18	Y5V	3000V	C≥1.5pF	TT21	Y5V	6.3V,10	C≥2.2μF	TT31	Y5V	6.3V	C≥10μF	TT31	Y5V	6.3V	C≥22μF	<table><tr><th>Rated</th><th>D.F. ≤</th><th>Exception of D.F. ≤</th></tr><tr><td>≥100V</td><td>≤3%</td><td>≤6% 1206 ≥0.47μF ≤7.5% 0805 >0.1μF, 0603 ≥0.068μF</td></tr><tr><td rowspan="3">≥50V</td><td rowspan="3">≤3%</td><td>≤6% 0201(50V);0603 ≥0.047μF; 0805 ≥0.18μF; 1206 ≥0.47μF</td></tr><tr><td>≤10% 1210 ≥4.7μF</td></tr><tr><td>≤20% 0402 ≥0.1μF;0603 ≥1μF; 0805 ≥1μF; 1206 ≥2.2μF; 1210 ≥10μF; TT series</td></tr><tr><td>35V</td><td>≤5%</td><td>≤20% 0603 ≥1μF; 0805 ≥2.2μF;1210 ≥10μF</td></tr><tr><td rowspan="4">25V</td><td rowspan="4">≤5%</td><td>≤10% 0201 ≥0.01μF;0805 ≥1μF; 1210 ≥10μF</td></tr><tr><td>≤14% 0603 ≥0.33μF;1206 ≥4.7μF</td></tr><tr><td>≤15% 0402 ≥0.10μF;0603 ≥0.47μF;0805 ≥2.2μF;1206 ≥6.8μF; 1210 ≥22μF; TT series</td></tr><tr><td>≤20% 0402 ≥1μF</td></tr><tr><td>16V</td><td>≤5%</td><td>≤10% 0603 ≥0.15μF;0805 ≥0.68μF;1206 ≥2.2μF;1210 ≥4.7μF</td></tr><tr><td rowspan="3">10V</td><td rowspan="3">≤7.5%</td><td>≤15% 0201 ≥0.01μF;0402 ≥0.033μF;0603 ≥0.68μF;0805 ≥2.2μF; 1206 ≥4.7μF; 1210 ≥22μF; TT series</td></tr><tr><td>≤15% 0201 ≥0.012μF; 0402 ≥0.33μF; 0603 ≥0.33μF;0805 ≥2.2μF; 1206 ≥2.2μF; 1210 ≥22μF</td></tr><tr><td>≤20% 0201 ≥0.1μF ;0402 ≥1μF; TT series</td></tr><tr><td>6.3V</td><td>≤15%</td><td>≤30% 0201 ≥0.1μF;0402 ≥1μF;0603 ≥10μF; 0805 ≥4.7μF;1206 ≥47μF;1210 ≥100μF;TT series</td></tr><tr><td>4V</td><td>≤20%</td><td>---</td></tr></table>	Rated	D.F. ≤	Exception of D.F. ≤	≥100V	≤3%	≤6% 1206 ≥0.47μF ≤7.5% 0805 >0.1μF, 0603 ≥0.068μF	≥50V	≤3%	≤6% 0201(50V);0603 ≥0.047μF; 0805 ≥0.18μF; 1206 ≥0.47μF	≤10% 1210 ≥4.7μF	≤20% 0402 ≥0.1μF;0603 ≥1μF; 0805 ≥1μF; 1206 ≥2.2μF; 1210 ≥10μF; TT series	35V	≤5%	≤20% 0603 ≥1μF; 0805 ≥2.2μF;1210 ≥10μF	25V	≤5%	≤10% 0201 ≥0.01μF;0805 ≥1μF; 1210 ≥10μF	≤14% 0603 ≥0.33μF;1206 ≥4.7μF	≤15% 0402 ≥0.10μF;0603 ≥0.47μF;0805 ≥2.2μF;1206 ≥6.8μF; 1210 ≥22μF; TT series	≤20% 0402 ≥1μF	16V	≤5%	≤10% 0603 ≥0.15μF;0805 ≥0.68μF;1206 ≥2.2μF;1210 ≥4.7μF	10V	≤7.5%	≤15% 0201 ≥0.01μF;0402 ≥0.033μF;0603 ≥0.68μF;0805 ≥2.2μF; 1206 ≥4.7μF; 1210 ≥22μF; TT series	≤15% 0201 ≥0.012μF; 0402 ≥0.33μF; 0603 ≥0.33μF;0805 ≥2.2μF; 1206 ≥2.2μF; 1210 ≥22μF	≤20% 0201 ≥0.1μF ;0402 ≥1μF; TT series	6.3V	≤15%	≤30% 0201 ≥0.1μF;0402 ≥1μF;0603 ≥10μF; 0805 ≥4.7μF;1206 ≥47μF;1210 ≥100μF;TT series	4V	≤20%	---
		Size	Dielectric	Rated	Capacitance																																																																														
		0201	X5R/X7R/X6S	6.3V, 10V	C≥0.1μF																																																																														
		0402	X5R/X7R/X6S	6.3V, 10V	C≥1.0μF																																																																														
		0603	X5R/X7R/X6S	4V	C≥22μF																																																																														
				6.3V, 10V	C≥4.7μF																																																																														
		0805	X5R/X7R/X6S	35V	C≥1.0μF																																																																														
				4V	C≥47μF																																																																														
		1206	X5R/X7R/X6S	6.3V	C≥22μF																																																																														
6.3V	C≥47μF																																																																																		
TT18	Y5V	3000V	C≥1.5pF																																																																																
TT21	Y5V	6.3V,10	C≥2.2μF																																																																																
TT31	Y5V	6.3V	C≥10μF																																																																																
TT31	Y5V	6.3V	C≥22μF																																																																																
Rated	D.F. ≤	Exception of D.F. ≤																																																																																	
≥100V	≤3%	≤6% 1206 ≥0.47μF ≤7.5% 0805 >0.1μF, 0603 ≥0.068μF																																																																																	
≥50V	≤3%	≤6% 0201(50V);0603 ≥0.047μF; 0805 ≥0.18μF; 1206 ≥0.47μF																																																																																	
		≤10% 1210 ≥4.7μF																																																																																	
		≤20% 0402 ≥0.1μF;0603 ≥1μF; 0805 ≥1μF; 1206 ≥2.2μF; 1210 ≥10μF; TT series																																																																																	
35V	≤5%	≤20% 0603 ≥1μF; 0805 ≥2.2μF;1210 ≥10μF																																																																																	
25V	≤5%	≤10% 0201 ≥0.01μF;0805 ≥1μF; 1210 ≥10μF																																																																																	
		≤14% 0603 ≥0.33μF;1206 ≥4.7μF																																																																																	
		≤15% 0402 ≥0.10μF;0603 ≥0.47μF;0805 ≥2.2μF;1206 ≥6.8μF; 1210 ≥22μF; TT series																																																																																	
		≤20% 0402 ≥1μF																																																																																	
16V	≤5%	≤10% 0603 ≥0.15μF;0805 ≥0.68μF;1206 ≥2.2μF;1210 ≥4.7μF																																																																																	
10V	≤7.5%	≤15% 0201 ≥0.01μF;0402 ≥0.033μF;0603 ≥0.68μF;0805 ≥2.2μF; 1206 ≥4.7μF; 1210 ≥22μF; TT series																																																																																	
		≤15% 0201 ≥0.012μF; 0402 ≥0.33μF; 0603 ≥0.33μF;0805 ≥2.2μF; 1206 ≥2.2μF; 1210 ≥22μF																																																																																	
		≤20% 0201 ≥0.1μF ;0402 ≥1μF; TT series																																																																																	
6.3V	≤15%	≤30% 0201 ≥0.1μF;0402 ≥1μF;0603 ≥10μF; 0805 ≥4.7μF;1206 ≥47μF;1210 ≥100μF;TT series																																																																																	
4V	≤20%	---																																																																																	
(6)150% of rated voltage for below range.	<table><tr><th>Size</th><th>Dielectric</th><th>Rated voltage</th><th>Capacitance range</th></tr><tr><td>0201</td><td>X5R/X7R/X6S</td><td>16V</td><td>C≥0.1μF</td></tr><tr><td rowspan="3">0402</td><td rowspan="3">X5R/X7R/X6S</td><td>50V</td><td>C≥0.1μF</td></tr><tr><td>10V~25V</td><td>C≥0.22μF</td></tr><tr><td>Y5V</td><td>16V</td><td>C≥0.47μF</td></tr><tr><td rowspan="2">0603</td><td rowspan="2">X5R/X7R/X6S</td><td>10V,50V</td><td>C≥1.0μF</td></tr><tr><td>Y5V</td><td>16V</td><td>C≥2.2μF</td></tr><tr><td rowspan="3">0805</td><td rowspan="3">X5R/X7R/X6S</td><td>10~50V</td><td>C≥4.7μF</td></tr><tr><td>50V</td><td>C≥2.2μF</td></tr><tr><td>100V</td><td>C≥0.47μF</td></tr><tr><td>2220</td><td>X7R</td><td>16V</td><td>C≥4.7μF</td></tr><tr><td>2220</td><td>X7R</td><td>100V</td><td>C≥6.8μF</td></tr></table>	Size	Dielectric	Rated voltage	Capacitance range	0201	X5R/X7R/X6S	16V	C≥0.1μF	0402	X5R/X7R/X6S	50V	C≥0.1μF	10V~25V	C≥0.22μF	Y5V	16V	C≥0.47μF	0603	X5R/X7R/X6S	10V,50V	C≥1.0μF	Y5V	16V	C≥2.2μF	0805	X5R/X7R/X6S	10~50V	C≥4.7μF	50V	C≥2.2μF	100V	C≥0.47μF	2220	X7R	16V	C≥4.7μF	2220	X7R	100V	C≥6.8μF	Y5V: <table><tr><th>Rated vol.</th><th>D.F. ≤</th><th>Exception of D.F. ≤</th></tr><tr><td>≥50V</td><td>7.5%</td><td>10% 0603 ≥0.1μF; 0805 ≥0.47μF; 1206 ≥4.7μF</td></tr><tr><td>35V</td><td>10%</td><td>---</td></tr><tr><td rowspan="3">25V</td><td rowspan="3">7.5%</td><td>10% 0402 ≥0.047μF;0603 ≥0.1μF; 0805 ≥0.33μF;1206 ≥1μF; 1210 ≥4.7μF</td></tr><tr><td>15% 0402 ≥0.068μF;0603 ≥0.47μF; 1206 ≥4.7μF; 1210 ≥22μF</td></tr><tr><td>20% 0402 ≥0.068μF; 0603 ≥0.68μF</td></tr><tr><td>16V (C<1.0μF)</td><td>10%</td><td>20% 0402 ≥0.22μF</td></tr><tr><td>16V (C≥1.0μF)</td><td>12.5%</td><td>20% 0603 ≥2.2μF; 0805 ≥3.3μF; 1206 ≥10μF;1210 ≥22μF; 1812 ≥47μF;</td></tr><tr><td>10V</td><td>20%</td><td>30% 0402 ≥0.47μF</td></tr><tr><td>6.3V</td><td>30%</td><td>---</td></tr></table>	Rated vol.	D.F. ≤	Exception of D.F. ≤	≥50V	7.5%	10% 0603 ≥0.1μF; 0805 ≥0.47μF; 1206 ≥4.7μF	35V	10%	---	25V	7.5%	10% 0402 ≥0.047μF;0603 ≥0.1μF; 0805 ≥0.33μF;1206 ≥1μF; 1210 ≥4.7μF	15% 0402 ≥0.068μF;0603 ≥0.47μF; 1206 ≥4.7μF; 1210 ≥22μF	20% 0402 ≥0.068μF; 0603 ≥0.68μF	16V (C<1.0μF)	10%	20% 0402 ≥0.22μF	16V (C≥1.0μF)	12.5%	20% 0603 ≥2.2μF; 0805 ≥3.3μF; 1206 ≥10μF;1210 ≥22μF; 1812 ≥47μF;	10V	20%	30% 0402 ≥0.47μF	6.3V	30%	---															
Size	Dielectric	Rated voltage	Capacitance range																																																																																
0201	X5R/X7R/X6S	16V	C≥0.1μF																																																																																
0402	X5R/X7R/X6S	50V	C≥0.1μF																																																																																
		10V~25V	C≥0.22μF																																																																																
		Y5V	16V	C≥0.47μF																																																																															
0603	X5R/X7R/X6S	10V,50V	C≥1.0μF																																																																																
		Y5V	16V	C≥2.2μF																																																																															
0805	X5R/X7R/X6S	10~50V	C≥4.7μF																																																																																
		50V	C≥2.2μF																																																																																
		100V	C≥0.47μF																																																																																
2220	X7R	16V	C≥4.7μF																																																																																
2220	X7R	100V	C≥6.8μF																																																																																
Rated vol.	D.F. ≤	Exception of D.F. ≤																																																																																	
≥50V	7.5%	10% 0603 ≥0.1μF; 0805 ≥0.47μF; 1206 ≥4.7μF																																																																																	
35V	10%	---																																																																																	
25V	7.5%	10% 0402 ≥0.047μF;0603 ≥0.1μF; 0805 ≥0.33μF;1206 ≥1μF; 1210 ≥4.7μF																																																																																	
		15% 0402 ≥0.068μF;0603 ≥0.47μF; 1206 ≥4.7μF; 1210 ≥22μF																																																																																	
		20% 0402 ≥0.068μF; 0603 ≥0.68μF																																																																																	
16V (C<1.0μF)	10%	20% 0402 ≥0.22μF																																																																																	
16V (C≥1.0μF)	12.5%	20% 0603 ≥2.2μF; 0805 ≥3.3μF; 1206 ≥10μF;1210 ≥22μF; 1812 ≥47μF;																																																																																	
10V	20%	30% 0402 ≥0.47μF																																																																																	
6.3V	30%	---																																																																																	
*Before initial measurement (Class II only): To apply test voltage for 1hr at test temp. and then set for 24±2 hrs at room temp.																																																																																			
*Measurement to be made after keeping at room temp. for 24±2 hrs																																																																																			
		*I.R.: ≥10V, 1GΩ or 50 Ω-F whichever is smaller. Class II (X7R, X5R, X6S, Y5V)																																																																																	
		<table><tr><th>Rated voltage</th><th>Insulation Resistance</th></tr><tr><td>100V: X7R</td><td rowspan="7">1GΩ or RxC ≥10 Ω-F whichever is smaller.</td></tr><tr><td>50V: 0402≥0.1μF;0603≥1μF;0805≥1μF;1206≥4.7μF;1210≥4.7μF</td></tr><tr><td>35V: 0603≥1μF; 0805≥2.2μF;1210 ≥10μF</td></tr><tr><td>25V:0402≥1μF;0603≥2.2μF;0805≥2.2μF;1206≥10μF;1210≥10μF</td></tr><tr><td>16V:0402≥0.22μF;0603≥1μF;0805≥2.2μF;1206≥10μF;1210≥47μF</td></tr><tr><td>10V:0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF; 1206≥4.7μF;1210≥47μF</td></tr><tr><td>6.3V ; 4V</td></tr></table>	Rated voltage	Insulation Resistance	100V: X7R	1GΩ or RxC ≥10 Ω-F whichever is smaller.	50V: 0402≥0.1μF;0603≥1μF;0805≥1μF;1206≥4.7μF;1210≥4.7μF	35V: 0603≥1μF; 0805≥2.2μF;1210 ≥10μF	25V:0402≥1μF;0603≥2.2μF;0805≥2.2μF;1206≥10μF;1210≥10μF	16V:0402≥0.22μF;0603≥1μF;0805≥2.2μF;1206≥10μF;1210≥47μF	10V:0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF; 1206≥4.7μF;1210≥47μF	6.3V ; 4V																																																																							
Rated voltage	Insulation Resistance																																																																																		
100V: X7R	1GΩ or RxC ≥10 Ω-F whichever is smaller.																																																																																		
50V: 0402≥0.1μF;0603≥1μF;0805≥1μF;1206≥4.7μF;1210≥4.7μF																																																																																			
35V: 0603≥1μF; 0805≥2.2μF;1210 ≥10μF																																																																																			
25V:0402≥1μF;0603≥2.2μF;0805≥2.2μF;1206≥10μF;1210≥10μF																																																																																			
16V:0402≥0.22μF;0603≥1μF;0805≥2.2μF;1206≥10μF;1210≥47μF																																																																																			
10V:0201≥47nF;0402≥0.47μF;0603≥0.47μF;0805≥2.2μF; 1206≥4.7μF;1210≥47μF																																																																																			
6.3V ; 4V																																																																																			

APPENDIXES

■ Tape & reel dimensions

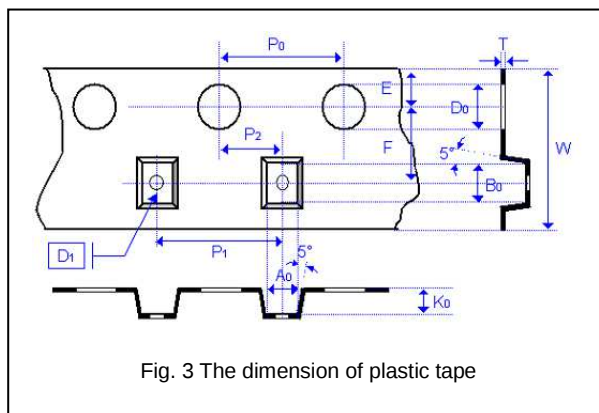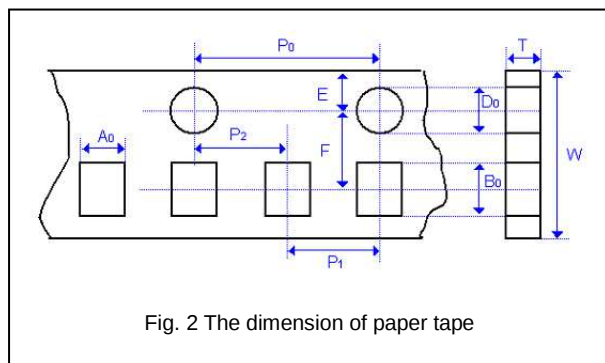


Size	0402		0603	0805			1206			1210			1812		
Thickness	N	E	S, X	A	B	C, D, I	B	C, J, D	G, P	C, D	G, K	M	D, K	M	U
A ₀	0.62±0.05	0.70±0.10	1.02±0.05	1.50±0.10	1.50±0.10	<1.57	2.00±0.10	<1.85	<1.95	<2.97	<2.97	<2.97	<3.81	<3.81	<3.90
B ₀	1.12±0.05	1.20±0.10	1.80±0.05	2.30±0.10	2.30±0.10	<2.40	3.50±0.10	<3.46	<3.67	<3.73	<3.73	<3.73	<5.30	<5.30	<5.30
T	0.60±0.05	0.70±0.10	0.95±0.05	0.75±0.05	0.95±0.05	0.23±0.05	0.95±0.05	0.23±0.05	0.23±0.05	0.23±0.05	0.23±0.05	0.23±0.05	0.25±0.05	0.25±0.05	0.25±0.05
K ₀	-	-	-	-	-	<2.50	-	<2.50	<2.50	<2.50	<2.50	<3.00	<2.50	<3.00	<3.50
W	8.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10	12.0±0.20	12.0±0.20	12.0±0.20
P ₀	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10
10xP ₀	40.0±0.10	40.0±0.10	40.0±0.10	40.0±0.10	40.0±0.10	40.0±0.10	40.0±0.10	40.0±0.10	40.0±0.10	40.0±0.10	40.0±0.10	40.0±0.10	40.0±0.10	40.0±0.10	40.0±0.20
P ₁	2.00±0.05	2.00±0.05	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	4.00±0.10	8.00±0.10	8.00±0.10	8.00±0.10
P ₂	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05	2.00±0.05
D ₀	1.55±0.05	1.55±0.05	1.55±0.05	1.55±0.05	1.55±0.05	1.50±0.05	1.50±0.05	1.50±0.05	1.50±0.05	1.50±0.05	1.50±0.05	1.50±0.05	1.50±0.05	1.50±0.05	1.50±0.10
D ₁	-	-	-	-	-	1.00±0.10	-	1.00±0.10	1.00±0.10	1.00±0.10	1.00±0.10	1.00±0.10	1.50±0.10	1.50±0.10	1.50±0.10
E	1.75±0.05	1.75±0.05	1.75±0.05	1.75±0.05	1.75±0.05	1.75±0.10	1.75±0.10	1.75±0.10	1.75±0.10	1.75±0.10	1.75±0.10	1.75±0.10	1.75±0.10	1.75±0.10	1.75±0.10
F	3.50±0.05	3.50±0.05	3.50±0.05	3.50±0.05	3.50±0.05	3.50±0.05	3.50±0.05	3.50±0.05	3.50±0.05	3.50±0.05	3.50±0.05	3.50±0.05	5.50±0.05	5.50±0.05	5.50±0.05

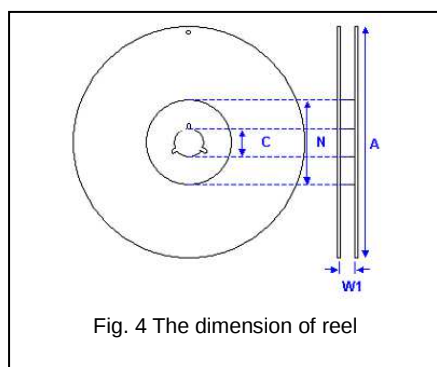

Size	0402, 0603, 0805, 1206, 1210			1812
Reel size	7"	10"	13"	7"
C	13.0+0.5/-0.2	13.0+0.5/-0.2	13.0+0.5/-0.2	13.0+0.5/-0.2
W ₁	8.4+1.5/-0	8.4+1.5/-0	8.4+1.5/-0	12.4+2.0/-0
A	178.0±0.10	250.0±1.0	330.0±1.0	178.0±0.10
N	60.0+1.0/-0	100.0±1.0	100±1.0	60.0+1.0/-0

■ Description of customer label

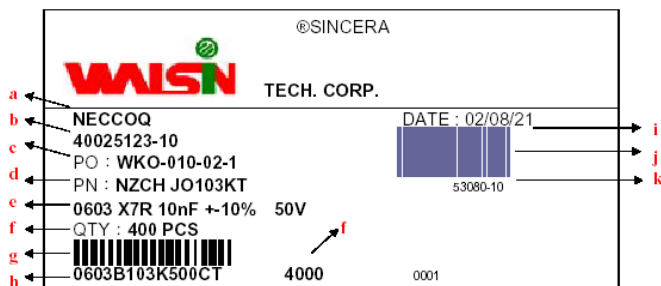

- a. Customer name
- b. WTC order series and item number
- c. Customer P/O
- d. Customer P/N
- e. Description of product
- f. Quantity
- g. Bar code including quantity & WTC P/N or customer
- h. WTC P/N
- i. Shipping date
- j. Order bar code including series and item numbers
- k. Serial number of label

■ Constructions

No.	Name		X7R, X5R, X6S, Y5V
①	Ceramic material		BaTiO ₃ based
②	Inner electrode		Ni
③	Termination	Inner layer	Cu
④		Middle layer	Ni
⑤		Outer layer	Sn (Matt)

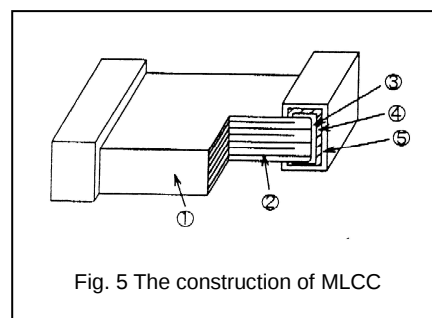


Fig. 5 The construction of MLCC

■ Storage and handling conditions

- (1) To store products at 5 to 40°C ambient temperature and 20 to 70% related humidity conditions.
- (2) The product is recommended to be used within one year after shipment. Check solderability in case of shelf life extension is needed.

Cautions:

- a. The corrosive gas reacts on the terminal electrodes of capacitors, and results in the poor solderability. Do not store the capacitors in the ambience of corrosive gas (e.g., hydrogen sulfide, sulfur dioxide, chlorine, ammonia gas etc.)
- b. In corrosive atmosphere, solderability might be degraded, and silver migration might occur to cause low reliability.
- c. Due to the dewing by rapid humidity change, or the photochemical change of the terminal electrode by direct sunlight, the solderability and electrical performance may deteriorate. Do not store capacitors under direct sunlight or dewing condition. To store products on the shelf and avoid exposure to moisture.

Recommended soldering conditions

The lead-free termination MLCCs are not only to be used on SMT against lead-free solder paste, but also suitable against lead-containing solder paste. If the optimized solder joint is requested, increasing soldering time, temperature and concentration of N₂ within oven are recommended.

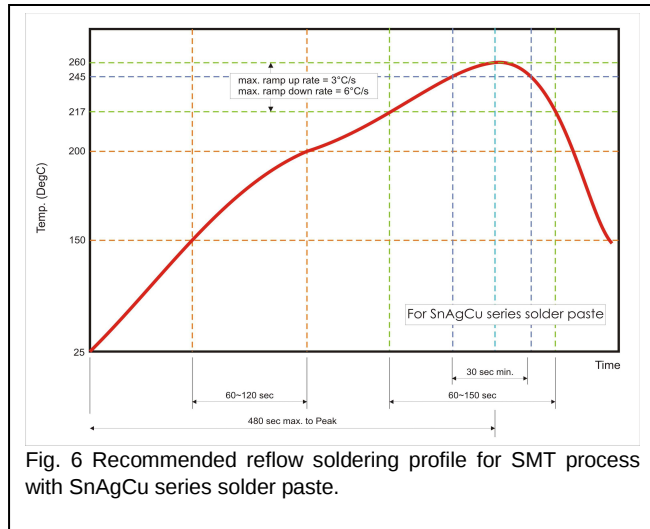


Fig. 6 Recommended reflow soldering profile for SMT process with SnAgCu series solder paste.

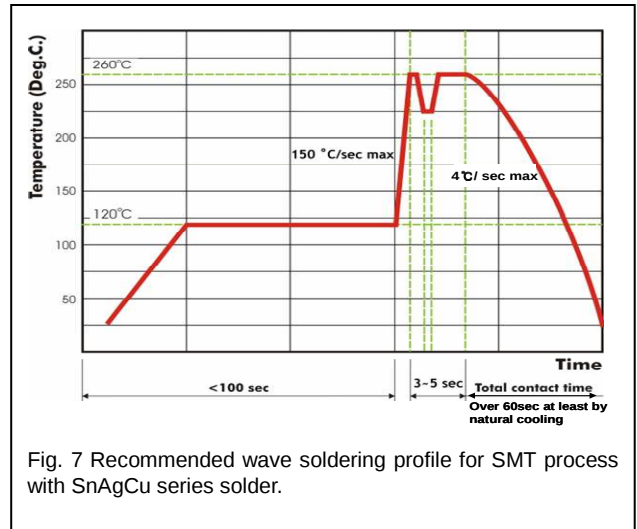


Fig. 7 Recommended wave soldering profile for SMT process with SnAgCu series solder.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Walsin:

<u>0402B471K500CT</u>	<u>0402B102K500CT</u>	<u>0402B152K500CT</u>	<u>0402B222K500CT</u>	<u>0402B392K500CT</u>	<u>0402B103K500CT</u>
<u>0402B103K250CT</u>	<u>0402B103K160CT</u>	<u>0402B123K160CT</u>	<u>0603B103K500CT</u>	<u>0402X104K160CT</u>	<u>0402X106M6R3CT</u>