
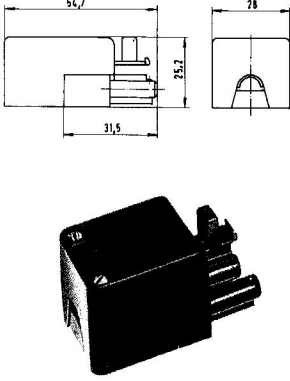
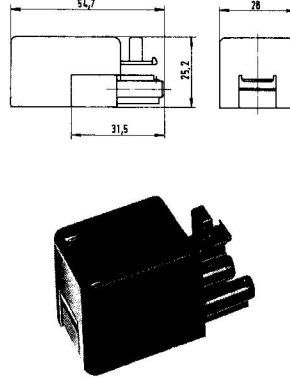
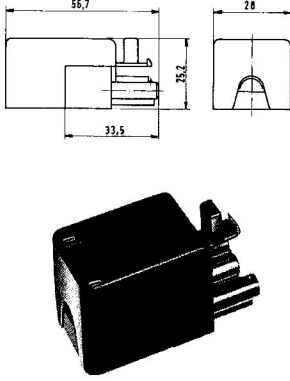
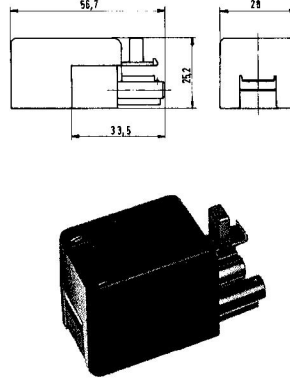









ST 18/3-pole plug components

250 V, 16 A

ST 18/3

<p>Terminal connection: single</p> <p>Strain relief device with screw guide and locating pins: for PVC-sheathed flexible cord 1 x round cable Ø 6.5–8.3 mm*</p> <p>Sheath strip length: 28 mm Insulation strip length: 7 mm</p> <p>Part no. Box Qty</p> 	<p>Terminal connection: single</p> <p>Strain relief device with screw guide and locating pins: for PVC-sheathed flexible cord 1 x round cable Ø 5.5–8.3 mm 2 x round cable Ø 5.5–7.2 mm 1 x flat cable 3.8 x 6.4 mm 4.6 x 8.1 mm</p> <p>Sheath strip length: 28 mm Insulation strip length: 7 mm</p> <p>Part no. Box Qty</p> 	<p>Terminal connection: dual</p> <p>Strain relief device with screw guide and locating pins: for PVC-sheathed flexible cord 1 x round cable Ø 6.5–8.3 mm*</p> <p>Sheath strip length: 28 mm Insulation strip length: 7 mm</p> <p>Part no. Box Qty</p> 	<p>Terminal connection: dual</p> <p>Strain relief device with screw guide and locating pins: for PVC-sheathed flexible cord 1 x round cable Ø 5.5–8.3 mm 2 x round cable Ø 5.5–7.2 mm 1 x flat cable 3.8 x 6.4 mm 4.6 x 8.1 mm</p> <p>Sheath strip length: 28 mm Insulation strip length: 7 mm</p> <p>Part no. Box Qty</p> 
<p>Plug component unassembled with strain relief device without locking device</p> <p>93.934.3353.0 200 93.934.3350.0 200 93.934.3750.0 200</p> <p>Plug component unassembled with strain relief device with locking device</p> <p>93.934.4353.0 200 93.934.4350.0 200 93.934.4750.0 200</p> <p>Part no. Box Qty</p> 	<p>Plug component unassembled with strain relief device without locking device</p> <p>93.834.3353.0 200 93.834.3350.0 200 93.834.3750.0 200</p> <p>Plug component unassembled with strain relief device with locking device</p> <p>93.834.4353.0 200 93.834.4350.0 200 93.834.4750.0 200</p> <p>Part no. Box Qty</p> 	<p>Plug component unassembled with strain relief device without locking device</p> <p>93.934.6353.0 200 93.934.6350.0 200</p> <p>Plug component unassembled with strain relief device with locking device</p> <p>93.934.7353.0 200 93.934.7350.0 200</p> <p>Part no. Box Qty</p> 	<p>Plug component unassembled with strain relief device without locking device</p> <p>93.834.6353.0 200 93.834.6350.0 200</p> <p>Plug component unassembled with strain relief device with locking device</p> <p>93.834.7353.0 200 93.834.7350.0 200</p> <p>Part no. Box Qty</p> 
<p>Strain relief device without locking device, base and top</p> <p>Z7.419.2553.0 200 Z7.419.2553.2 200</p> <p>Strain relief device with locking device, base and top</p> <p>Z7.419.2053.0 200 Z7.419.2053.2 200</p> <p>¹⁾ Socket component green, strain relief device black (Note: observe coding!)</p> <p>* Larger strain relief device on request!</p> 	<p>Strain relief device without locking device, base and top</p> <p>Z7.419.5253.0 200 Z7.419.5253.2 200</p> <p>Strain relief device with locking device, base and top</p> <p>Z7.419.5053.0 200 Z7.419.5053.2 200</p> <p>¹⁾ Socket component green, strain relief device black (Note: observe coding!)</p> <p>* Larger strain relief device on request!</p> 	<p>Strain relief device without locking device, base and top</p> <p>Z7.419.2453.0 200 Z7.419.2453.2 200</p> <p>Strain relief device with locking device, base and top</p> <p>Z7.419.2353.0 200 Z7.419.2353.2 200</p> <p>* Larger strain relief device on request!</p> 	<p>Strain relief device without locking device, base and top</p> <p>Z7.419.2853.0 200 Z7.419.2853.2 200</p> <p>Strain relief device with locking device, base and top</p> <p>Z7.419.2653.0 200 Z7.419.2653.2 200</p> <p>* Larger strain relief device on request!</p> 

The order numbers printed in bold type can be supplied with short lead times. Goods are supplied unassembled.