



SCHEDA TECNICA RACCORDI SERIE METALLO

METAL LINE FITTINGS SPECIFICATION SHEET - FICHE TECHNIQUE RACCORDS SERIE METAL - METAL-BAUREIHE STECKANSCHLUSSE TECHNISCHES BLATT

CARATTERISTICHE TECNICHE PRINCIPALI

MAIN TECHNICAL FEATURES - PRINCIPALES CARACTERISTIQUES TECHNIQUES - MAIN TECHNISCHE DATEN

MATERIALI DI COSTRUZIONE:
OTTONE (EN 12164 - CW614N)
NICHELATO - ZAMA-15 (UNI EN 1774:99) NICHELATA

PRESSIONE MAX D'ESERCIZIO:
16 BAR (1,6 MPa)

TEMPERATURA DI LAVORO:
-10°C (263°K), +80°C (353°K)

MATERIEL DE FABRICATION:
LAITON (EN 12164-CW614N)
NICKELE ZAMA-15 (UNI EN 1774:99) NICKELEE

PRESSION MAXI D'EXERCICE: 16 BAR (1,6 MPa)

TEMPERATURE DE TRAVAIL:
-10°C (263°K), +80°C (353°K)

MATERIALS OF CONSTRUCTION:
NICKEL-PLATED BRASS (EN 12164 - CW614N)
NICKEL-PLATED ZAMA-15 (UNI EN 1774:99)


MAX WORKING PRESSURE:
16 BAR (1,6 MPa)

WORKING TEMPERATURE:
-10°C (263°K), +80°C (353°K)

HERSTELLUNGSMATERIAL:
MESSING (EN 12164-CW614N)
VERNICKELT
VERNICKELT ZAMAK-15 (UNI EN 1774:99)

HÖCHSTBETRIEBSDRUCK:
16 BAR (1,6 MPa)

BETRIEBSTEMPERATUREN:
-10°C (263°K), +80°C (353°K)

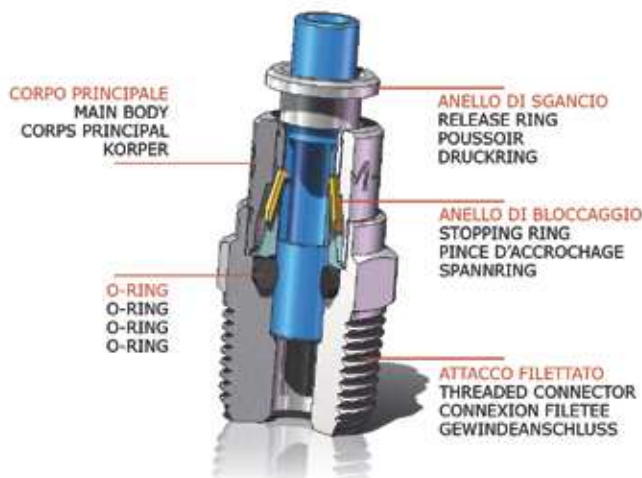

O-RING/GUARNIZIONI RUBBER - JOINTS - DICHTUNGEN



GUARNIZIONI IN GOMMA ANTIOILIO NBR, ESENTI DA SILICONE
OIL-PROOF RUBBER PACKINGS NBR, SILICON FREE
JOINTS EN CAOUTCHOUC ANTI-HUILE NBR, LIBRES DE SILICONE
DICHTUNGEN NBR, ÖLBESTÄNDIG, SILICONFREI

O-RING SPECIALI A RICHIESTA
SPECIAL O-RINGS ON REQUEST
JOINTS SPECIAUX SUR DEMANDE
ANDERE DICHTUNGEN AUF ANFRAGE



TIPI DI TUBO INNESTABILI

TUBES D'ACCOUPLEMENT - SUITABLE FOR - SCHLAUCHTYPEN

RILSAN (PA11/12), POLIURETANO, POLIETILENE, POLIESTERE, TEFLON, NYLON (PA6): $\pm 0,05$ ($\varnothing 4 \div \varnothing 10$) - $\pm 0,1$ ($\varnothing 12 \div \varnothing 14$).
RILSAN (PA11/12), POLYURETHANE, POLYETHYLENE, POLYESTERE, TEFLON, NYLON (PA6): $\pm 0,05$ ($\varnothing 4 \div \varnothing 10$) - $\pm 0,1$ ($\varnothing 12 \div \varnothing 14$).
RILSAN (PA11/12), POLYURÉTHANE, POLYÉTHYLÈNE, POLYESTER, TEFLON, NYLON (PA6): $\pm 0,05$ ($\varnothing 4 \div \varnothing 10$) - $\pm 0,1$ ($\varnothing 12 \div \varnothing 14$).
RILSAN (PA11/12), POLYURETHAN, POLYÄTYLEN, POLYESTER, TEFLON, NYLON (PA6): $\pm 0,05$ ($\varnothing 4 \div \varnothing 10$) - $\pm 0,1$ ($\varnothing 12 \div \varnothing 14$).

TUBI IN POLLICI

HOSES INCHES - TUBES EN POUCES - SCHLAUCH IN ZOLL

A RICHIESTA, POSSIBILITÀ DI FORNIRE ARTICOLI SERIE METALLO ANCHE PER TUBO 1/4"

METAL SERIES FITTINGS FOR 1/4" TUBE AVAILABLE ON REQUEST

RACCORDS SERIE METAL DISPONIBLES SUR DEMANDE POUR TUBE 1/4"

AUF ANFRAGE SIND VERBINDUNGEN DER METALLSERIE AUCH FÜR SCHLÄUCHE MIT 1/4" LIEFERBAR

TIPOLOGIE DI ATTACCO FILETTATO

THREADED CONNETTOR TYPE - TYPES DES CONNEXION FILETEE - ARTEN VON GEWINDENSCHLUSS



FILETTO CILINDRICO CON O-RING
PARALLEL THREAD WITH O-RING
FILET CYLINDRIQUE AVEC JOINT MONTE
ZYLINDRISCHES GEWINDE MIT O-RING
UNI-ISO 228/1



FILETTO METRICO CON O-RING
METRIC THREAD WITH O-RING
FILET METRIQUE AVEC JOINT MONTE
METRISCHES GEWINDE MIT O-RING
UNI 5542-65



FILETTO CONICO CON TEFLON
TAPERED THREAD WITH PTFE
FILET CONIQUE AVEC TEFLON
KONISCHES GEWINDE MIT TEFLON
UNI-EN 10226-1



FILETTO CONICO NPT
TAPERED THREAD NPT
FILET CONIQUE NPT
KONISCHES GEWINDE NPT
ANSI/ASME B1.20.1



FILETTO CILINDRICO FEMMINA
FEMALE PARALLEL THREAD
FILET CYLINDRIQUE FEMELLE
ZYLINDRISCHES INNENGEWINDE
UNI-ISO 228/1



FILETTI SPECIALI

SPECIAL THREADS - FILETAGES SPECIAUX - SPEZIALGEWINDE

A RICHIESTA, POSSIBILITÀ DI ESEGUIRE FILETTATURE SPECIALI

SPECIAL THREADS AVAILABLE UPON REQUEST

FILETAGES SPECIAUX DISPONIBLES SUR DEMANDE

AUF ANFRAGE GIBT ES DIE MÖGLICHKEIT, SPEZIALGEWINDE HERZUSTELLEN