


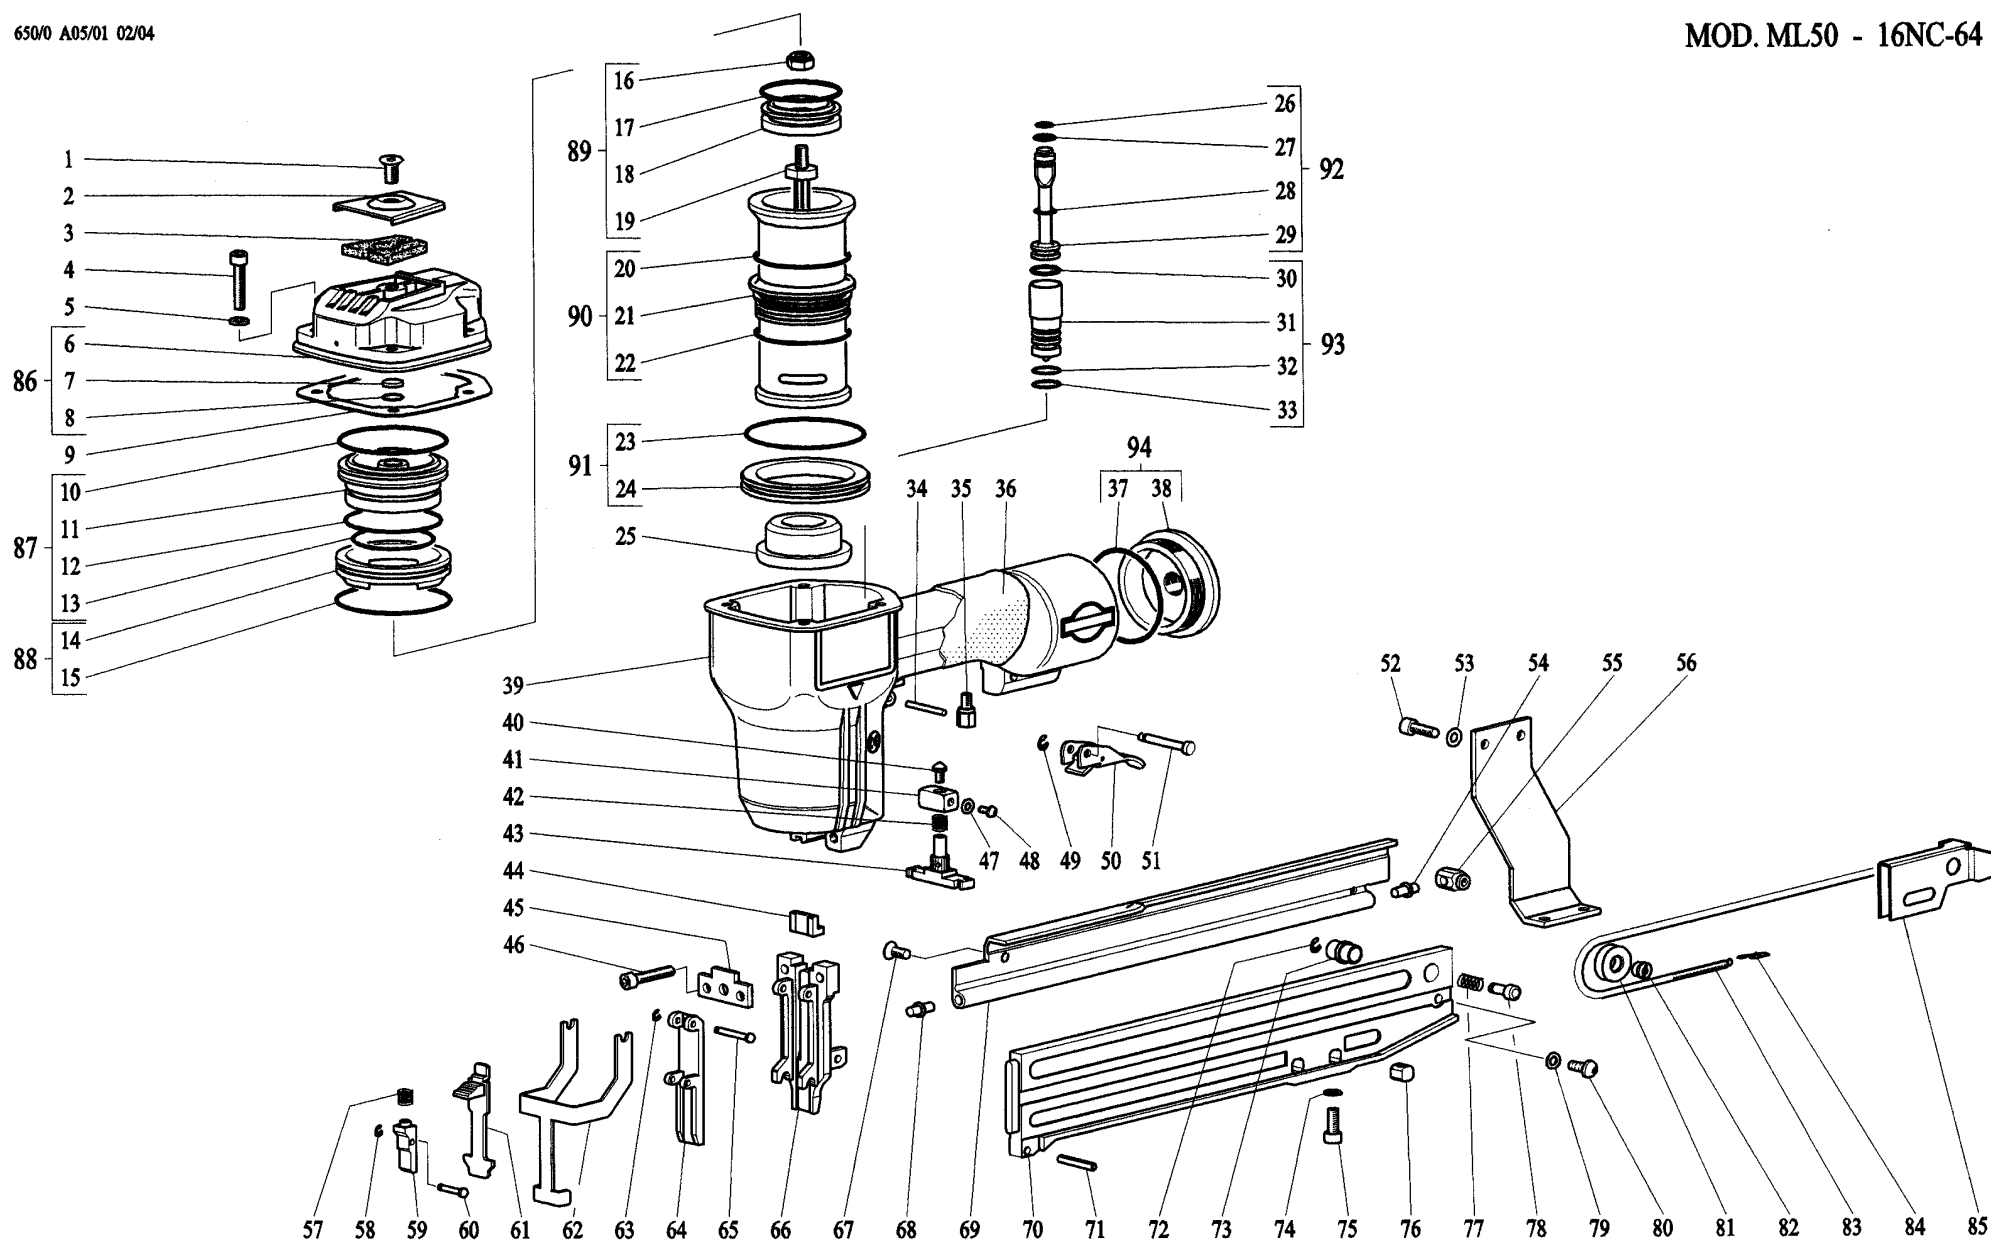

RIF. COD.

1	B000028A12	40	C620463A01	79	B000022A02
2	C450101A01	41	C640464A01	80	B000028E10
3	C450103A01	42	C620465A01	81	C650684A01
4	B000028C04	43	D650484A01	82	C620824A01
5	C450180A01	44	C650503A01	83	C650842A01
6	D450123A01	45	C650500A01	84	C620884A01
7	C240160A01	46	B000028B20	85	C650860A01
8	B000020A06	47	B000022A01	86	D450123A01
9	C450181A01	48	B000028E03	87	D450202A01
10	B000020A45	49	B000021C01	88	D450204A01
11	D450202A01	50	D450441A01	89	D650226A01
12	B000020A42	51	C620424A01	90	D650241A01
13	B000020A40	52	B000028B14	91	D450243A01
14	D450204A01	53	B000022A02	92	D650304A01
15	B000020A47	54	C650734A01	93	D650361A01
16	B000023B04	55	C650737A01	94	D450283A01
17	B000020A54	56	C650701A03		
18	C450220A01	57	C416761N01		
19	C650225A01	58	B000021C03		
20	B000020A42	59	C650699A01		
21	D650241A01	60	C650698A03		
22	B000020A41	61	C650684A01		
23	B000020A50	62	C650600A01		
24	D450243A01	63	B000021C03		
25	C450244A01	64	C650551A01		
26	B000020B02	65	C650524A01		
27	B000020B01	66	C650540A05		
28	B000020B10	67	B000028A03		
29	D650304A01	68	C650734A01		
30	B000020B10	69	C650720A01		
31	D650361A01	70	C650937A05		
32	B000020A19	71	B000026A07		
33	B000020A19	72	B000021C01		
34	B000026A12	73	C650948A01		
35	C620408A01	74	B000022A02		
36	C450262A01	75	B000028B13		
37	B000020A42	76	C650710A01		
38	D450283A01	77	C430401A02		
39	C650261A01	78	C650949A01		

Codice **A650000A05**
Modello **ML50**
Tipo Punto **16NC**
Lungh. min. **30 mm.**
Lungh. max. **64 mm.**

Kode **A650000A05**
Modell **ML50**
Klammer Typ **16NC**
Min. Länge **30 mm.**
Max. Länge **64 mm.**

Code **A650000A05**
Model **ML50**
Staple type **16NC**
Min. length **30 mm.**
Max. length **64 mm.**

Code **A650000A05**
Modèle **ML50**
Agrafe type **16NC**
Longueur min. **30 mm.**
Longueur max. **64 mm.**

Código **A650000A05**
Modelo **ML50**
Grapa tipo **16NC**
Largueza min. **30 mm.**
Largueza max. **64 mm.**

Codigo **A650000A05**
Modelo **ML50**
Tipo de agrafe **16NC**
Largura min. **30 mm.**
Largura max. **64 mm.**

DATI TECNICI

Peso: **2250 gr.**
Dimensioni: **86-272-362 mm.**
Consumo aria: **1,98 NI/colpo (6 bar)**
Pressione min.: **4,0 bar**
Pressione max.: **7,0 bar**

TECHNISCHE DATEN

Gewicht: **2250 gr.**
Abmessungen: **86-272-362 mm.**
Luftverbrauch: **1,98 NI/pro Schlag (6 bar)**
Min.Betriebsdruck: **4,0 bar**
Max.Betriebsdruck: **7,0 bar**

TECHNICAL FEATURES

Weight: **2250 gr.**
Dimensions: **86-272-362 mm.**
Air consumption: **1,98 NI/shot (6 bar)**
Min.working pressure: **4,0 bar**
Max.working pressure: **7,0 bar**

DONNEES TECHNIQUES

Poids: **2250 gr.**
Dimensions: **86-272-362 mm.**
Consommation d'air: **1,98 NI/coup (6 bar)**
Pression de fonction min.: **4,0 bar**
Pression de fonction max.: **7,0 bar**

DATOS TECNICOS

Peso: **2250 gr.**
Dimensiones: **86-272-362 mm.**
Consumo de aire: **1,98 NI/disparo (6 bar)**
Presion min.: **4,0 bar**
Presion max.: **7,0 bar**

CARACTERISTICAS TECNICAS

Peso: **2250 gr.**
Dimensões: **86-272-362 mm.**
Consumo de ar: **1,98 NI/disparo (6 bar)**
Pressão min.: **4,0 bar**
Pressão max.: **7,0 bar**

POTENZA ACUSTICA

DIRETTIVA 89/392 CEE
prEN 12549 (1999)
UNI EN ISO 3744 (1997)
LwA= **89,4 (dB)**
LpA 60S 1M= **88,7 (dB)**

SCHALLEISTUNG

EWG RICHTLINIE 89/392
prEN 12549 (1999)
UNI EN ISO 3744 (1997)
LwA= **89,4 (dB)**
LpA 60S 1M= **88,7 (dB)**

NOISE POWER

EEC DIRECTIVE 89/392
prEN 12549 (1999)
UNI EN ISO 3744 (1997)
LwA= **89,4 (dB)**
LpA 60S 1M= **88,7 (dB)**

PUISSANCE ACOUSTIQUE

DIRECTIVE CEE 89/392
prEN 12549 (1999)
UNI EN ISO 3744 (1997)
LwA= **89,4 (dB)**
LpA 60S 1M= **88,7 (dB)**

POTENCIA ACUSTICA

NORMATIVA 89/392 CEE
prEN 12549 (1999)
UNI EN ISO 3744 (1997)
LwA= **89,4 (dB)**
LpA 60S 1M= **88,7 (dB)**

POTENCIA ACUSTICA

DIRETTIVA 89/392 CEE
prEN 12549 (1999)
UNI EN ISO 3744 (1997)
LwA= **89,4 (dB)**
LpA 60S 1M= **88,7 (dB)**

VIBRAZIONI PRODOTTE

DIRETTIVA 89/392 CEE
ISO/FDIS 8662-11 (1999)
ah.w.3s= **2,8 (m/s²)**

GERAETEBEZOGENER

VIBRATIONSWERT
EWG RICHTLINIE 89/392
ISO/FDIS 8662-11 (1999)
ah.w.3s= **2,8 (m/s²)**

TOOL RELATED VIBRATION
VALUE

EEC DIRECTIVE 89/392
ISO/FDIS 8662-11 (1999)
ah.w.3s= **2,8 (m/s²)**

VALEUR DES VIBRATIONS
PAR LA MACHINE

DIRECTIVE CEE 89/392
ISO/FDIS 8662-11 (1999)
ah.w.3s= **2,8 (m/s²)**

VIBRACION PRODUCIDA

NORMATIVA 89/392 CEE
ISO/FDIS 8662-11 (1999)
ah.w.3s= **2,8 (m/s²)**

NIVEL DE VIBRACAO
DO PRODUTO

DIRETTIVA 89/392 CEE
ISO/FDIS 8662-11 (1999)
ah.w.3s= **2,8 (m/s²)**