


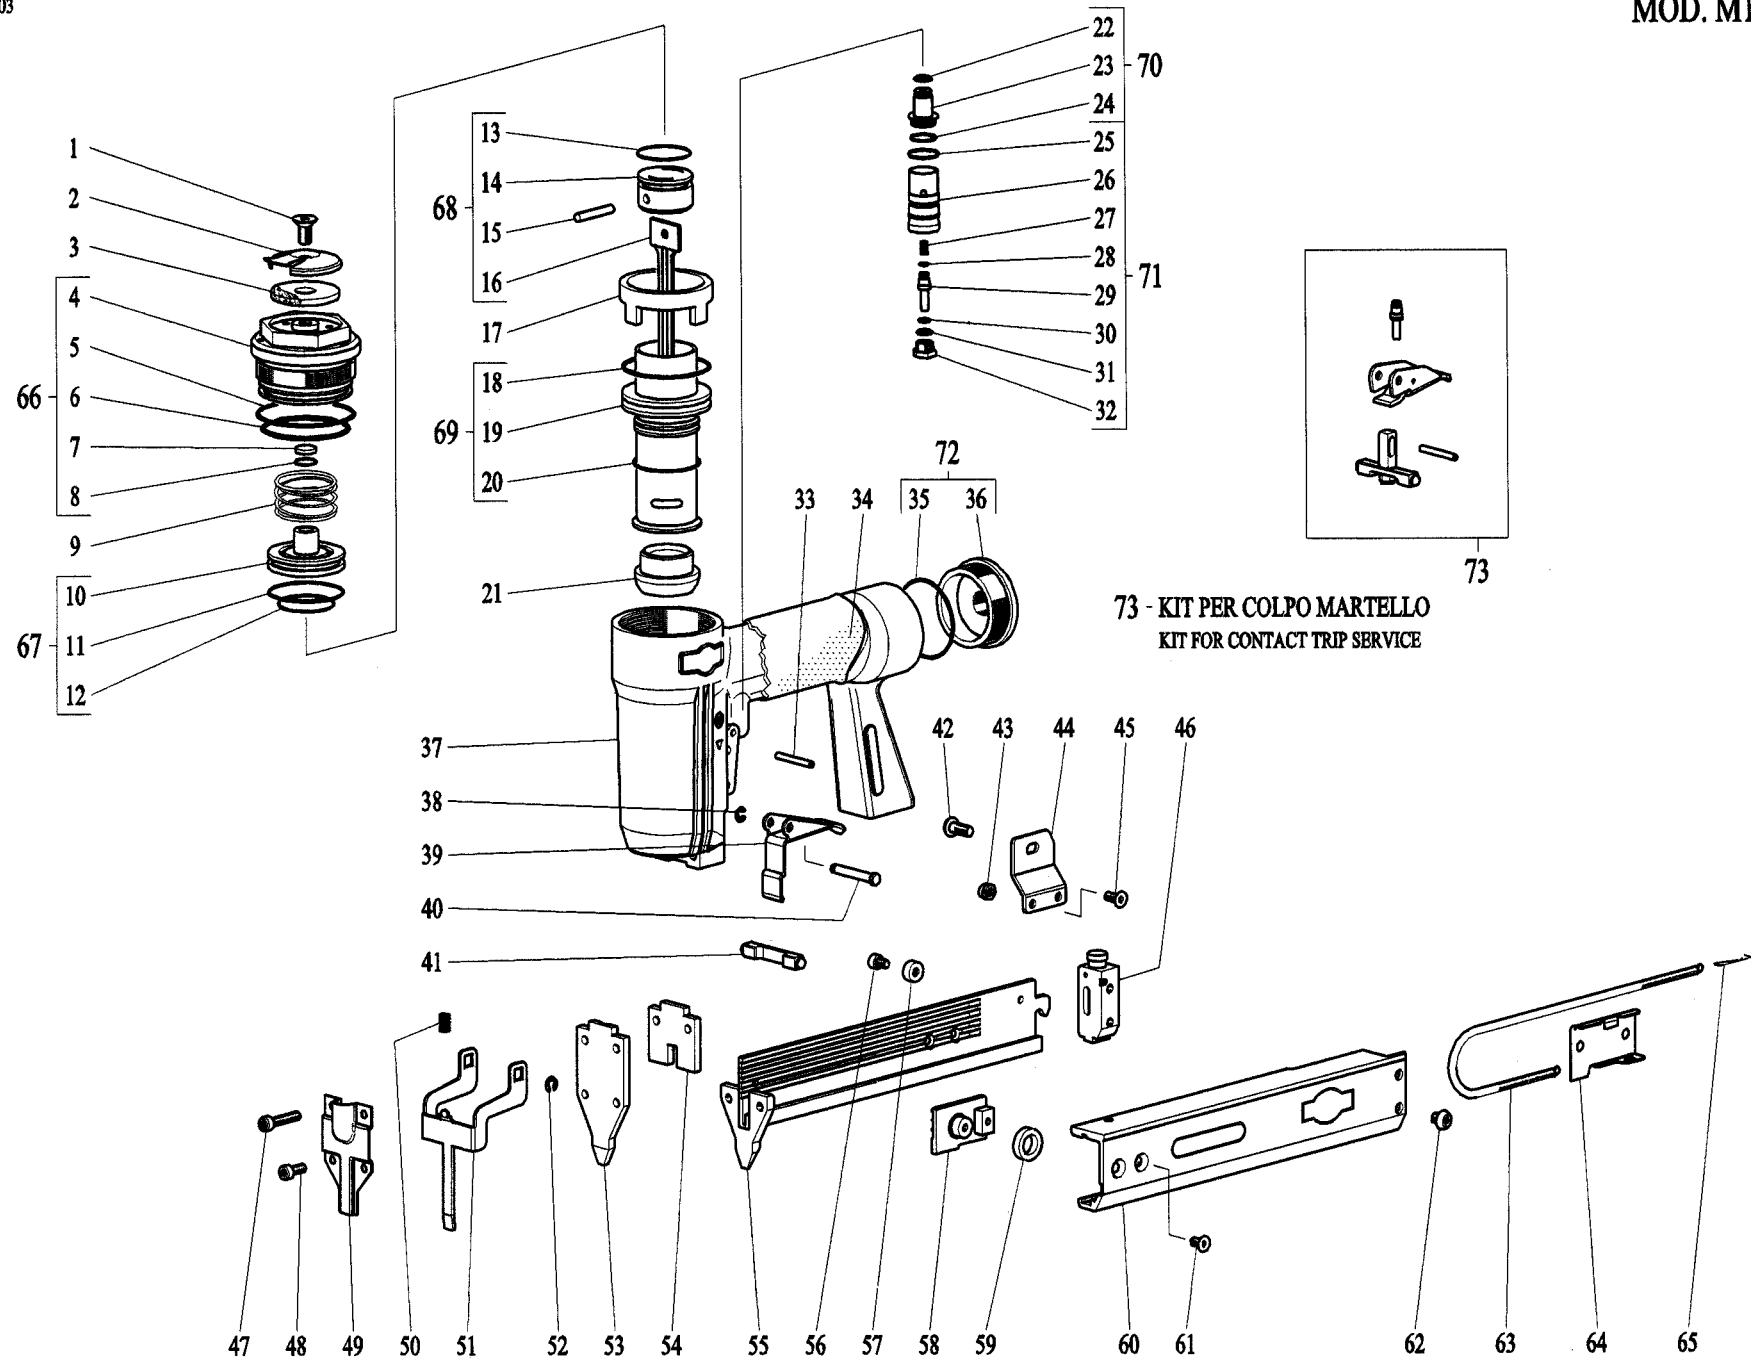

RIF. COD.

1	B000028A10	40	C620424A01
2	C425100A01	41	C420483B01
3	C425103A02	42	B000028E10
4	D425123A01	43	B000023B01
5	B000020A40	44	C715701K01
6	B000020A39	45	B000028A22
7	C225160A01	46	D710954N01
8	B000020A04	47	B000028B07
9	C016200A01	48	B000028B03
10	D421202A01	49	C715681K01
11	B000020A36	50	C216661B02
12	B000020A33	51	C715600K01
13	B000020A31	52	B000021C01
14	C425220A01	53	C715540K01
15	B000025A12	54	C715500K01
16	C715225K01	55	D715939K01
17	C425242A01	56	B000028B01
18	B000020A39	57	C710990N01
19	D715241K01	58	C710822N01
20	B000020A24	59	C710820N01
21	C225244A01	60	D715729K01
22	B000020A17	61	B000028A20
23	D416302A01	62	B000028E15
24	B000020A01	63	C230842A02
25	B000020A03	64	C715860K01
26	D715361A01	65	C710884N01
27	C216340A01	66	D425123A01
28	B000020A14	67	D421202A01
29	D425345A01	68	D715226K01
30	B000020A14	69	D715241K01
31	B000020A18	70	D416302A01
32	D416322A01	71	D715361A01
33	B000026A15	72	D425283A01
34	C425262A01	73	D715444A01
35	B000020A36		
36	D425283A01		
37	C715261K01		
38	B000021C01		
39	C420431B01		

Codice **A715000K01**
Modello **M15**
Tipo Punto **GF**
Lungh. min. **12 mm.**
Lungh. max. **30 mm.**

Kode **A715000K01**
Modell **M15**
Klammer Typ **GF**
Min. Länge **12 mm.**
Max. Länge **30 mm.**

Code **A715000K01**
Model **M15**
Staple type **GF**
Min. length **12 mm.**
Max. length **30 mm.**

Code **A715000K01**
Modèle **M15**
Agrafe type **GF**
Longueur min. **12 mm.**
Longueur max. **30 mm.**

Código **A715000K01**
Modelo **M15**
Grapa tipo **GF**
Largura min. **12 mm.**
Largura max. **30 mm.**

Codigo **A715000K01**
Modelo **M15**
Tipo de agrafe **GF**
Largura min. **12 mm.**
Largura max. **30 mm.**

DATI TECNICI

Peso: **1100 gr.**
Dimensioni: **55-196-230 mm.**
Consumo aria: **0,50 NI/colpo (6 bar)**
Pressione min.: **4,0 bar**
Pressione max.: **7,0 bar**

TECHNISCHE DATEN

Gewicht: **1100 gr.**
Abmessungen: **55-196-230 mm.**
Luftverbrauch: **0,50 NI/pro Schlag (6 bar)**
Min.Betriebsdruck: **4,0 bar**
Max.Betriebsdruck: **7,0 bar**

TECHNICAL FEATURES

Weight: **1100 gr.**
Dimensions: **55-196-230 mm.**
Air consumption: **0,50 NI/shot (6 bar)**
Min.working pressure: **4,0 bar**
Max.working pressure: **7,0 bar**

DONNEES TECHNIQUES

Poids: **1100 gr.**
Dimensions: **55-196-230 mm.**
Consommation d'air: **0,50 NI/coup (6 bar)**
Pression de fonction min.: **4,0 bar**
Pression de fonction max.: **7,0 bar**

DATOS TECNICOS

Peso: **1100 gr.**
Dimensiones: **55-196-230 mm.**
Consumo de aire: **0,50 NI/disparo (6 bar)**
Presion min.: **4,0 bar**
Presion max.: **7,0 bar**

CARACTERISTICAS TECNICAS

Peso: **1100 gr.**
Dimensões: **55-196-230 mm.**
Consumo de ar: **0,50 NI/disparo (6 bar)**
Pressão min.: **4,0 bar**
Pressão max.: **7,0 bar**

POTENZA ACUSTICA

DIRETTIVA 89/392 CEE
prEN 12549 (1999)
UNI EN ISO 3744 (1997)
LwA= **81,2 (dB)**
LpA 60S 1M= **79,6 (dB)**

SCHALLEISTUNG

EWG RICHTLINIE 89/392
prEN 12549 (1999)
UNI EN ISO 3744 (1997)
LwA= **81,2 (dB)**
LpA 60S 1M= **79,6 (dB)**

NOISE POWER

EEC DIRECTIVE 89/392
prEN 12549 (1999)
UNI EN ISO 3744 (1997)
LwA= **81,2 (dB)**
LpA 60S 1M= **79,6 (dB)**

PUISSANCE ACOUSTIQUE

DIRECTIVE CEE 89/392
prEN 12549 (1999)
UNI EN ISO 3744 (1997)
LwA= **81,2 (dB)**
LpA 60S 1M= **79,6 (dB)**

POTENCIA ACUSTICA

NORMATIVA 89/392 CEE
prEN 12549 (1999)
UNI EN ISO 3744 (1997)
LwA= **81,2 (dB)**
LpA 60S 1M= **79,6 (dB)**

POTENCIA ACUSTICA

DIRETTIVA 89/392 CEE
prEN 12549 (1999)
UNI EN ISO 3744 (1997)
LwA= **81,2 (dB)**
LpA 60S 1M= **79,6 (dB)**

VIBRAZIONI PRODOTTE

DIRETTIVA 89/392 CEE
ISO/FDIS 8662-11 (1999)
ah.w.3s= inferiore a **2,5 (m/s²)**

GERAETEBEZOGENER

VIBRATIONSWERT
EWG RICHTLINIE 89/392
ISO/FDIS 8662-11 (1999)
ah.w.3s= unter **2,5 (m/s²)**

**TOOL RELATED VIBRATION
VALUE**

EEC DIRECTIVE 89/392
ISO/FDIS 8662-11 (1999)
ah.w.3s= below **2,5 (m/s²)**

**VALEUR DES VIBRATIONS
PAR LA MACHINE**

DIRECTIVE CEE 89/392
ISO/FDIS 8662-11 (1999)
ah.w.3s= inférieur à **2,5 (m/s²)**

VIBRACION PRODUCIDA

NORMATIVA 89/392 CEE
ISO/FDIS 8662-11 (1999)
ah.w.3s= inferior a **2,5 (m/s²)**

**NIVEL DE VIBRAÇÃO
DO PRODUTO**

DIRETTIVA 89/392 CEE
ISO/FDIS 8662-11 (1999)
ah.w.3s= inferior a **2,5 (m/s²)**