


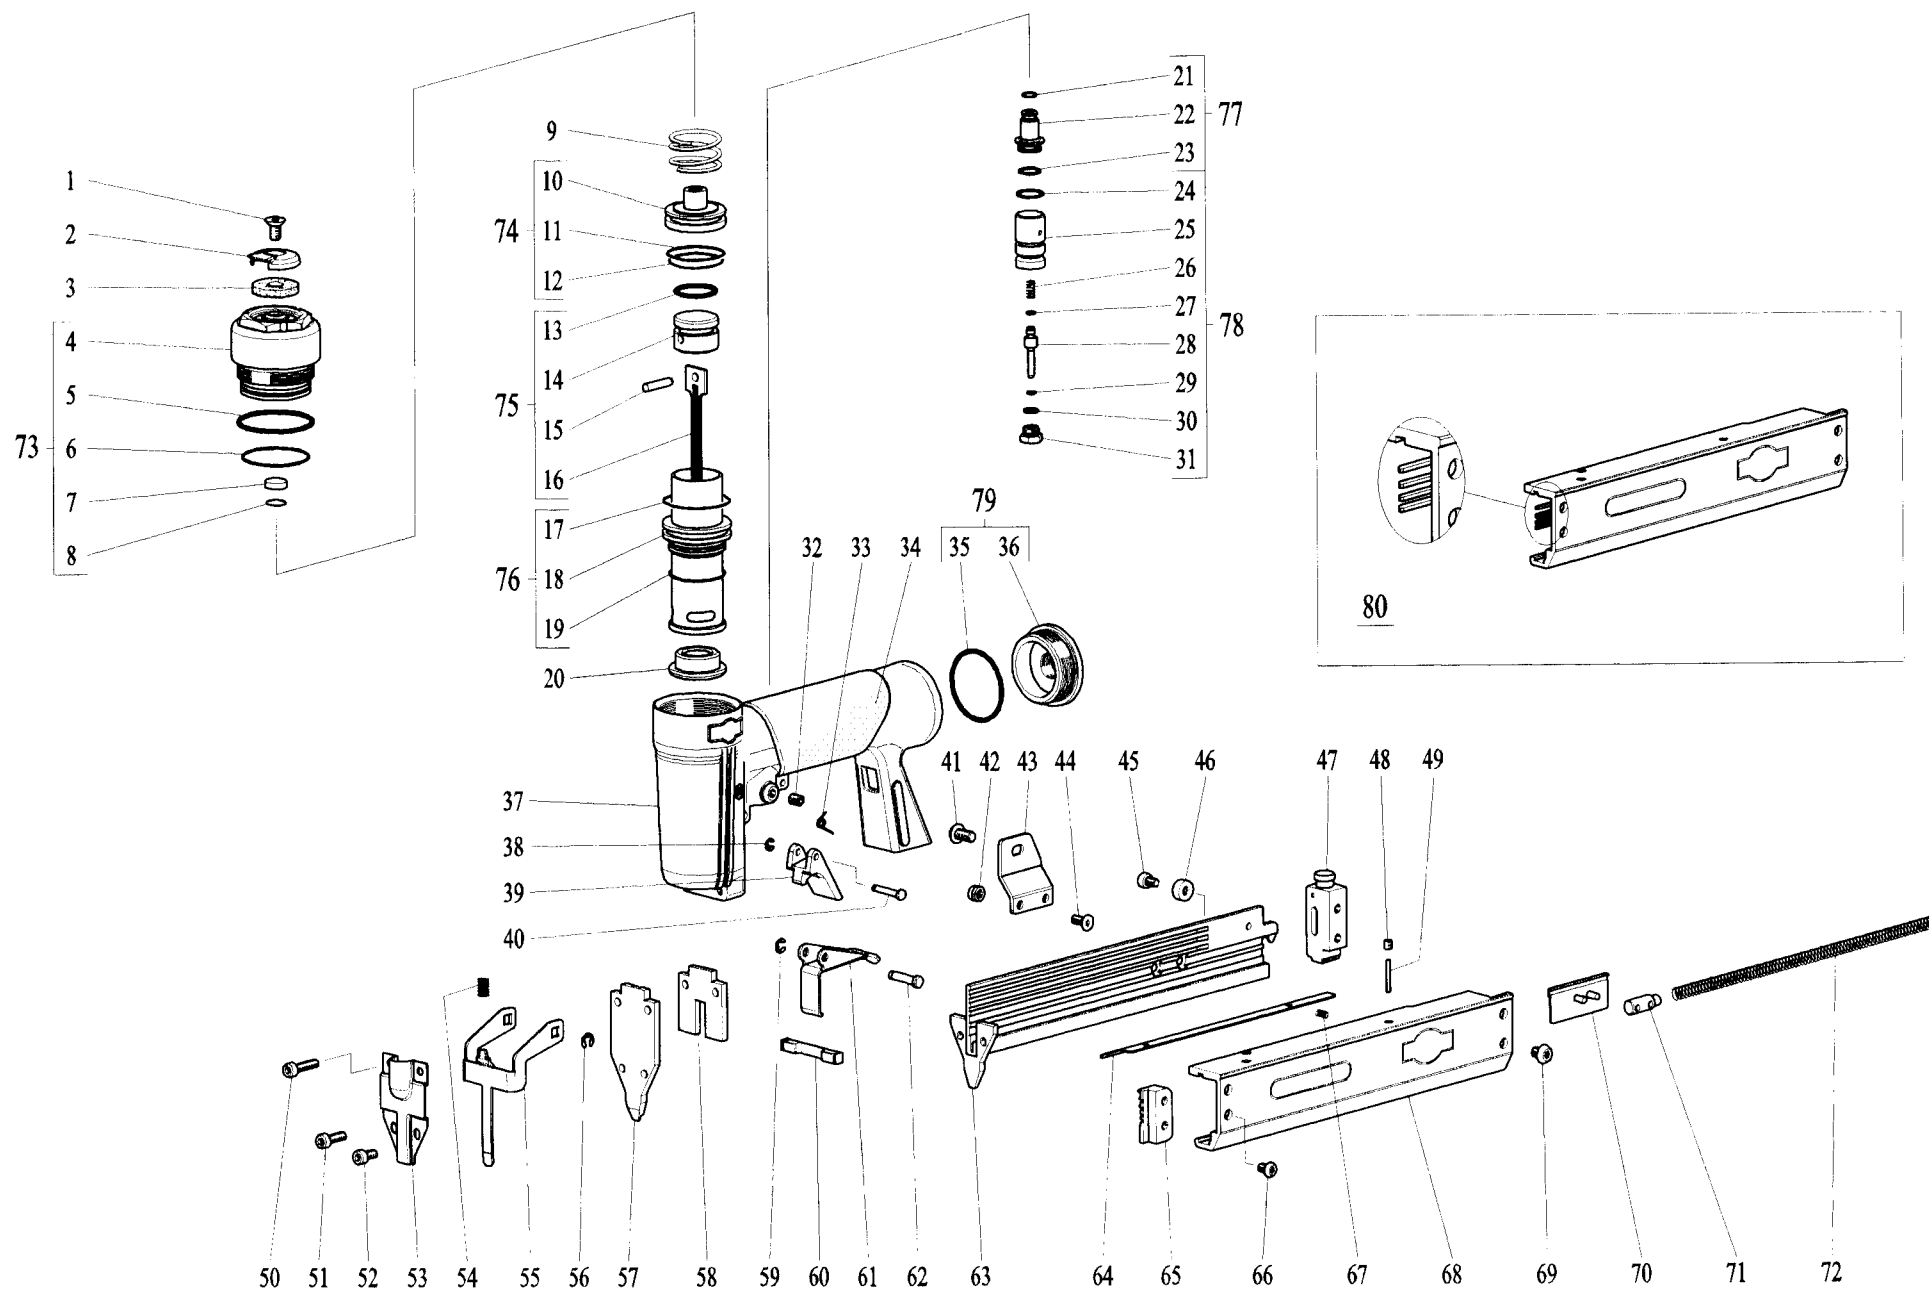

RIF.	COD.				DATI TECNICI	POTENZA ACUSTICA	VIBRAZIONI PRODOTTE
1	B000028A04	43	C710701M01	Codice A710000M07	Peso: 1020 gr.	DIRETTIVA 89/392 CEE	DIRETTIVA 89/392 CEE
2	C416100A01	44	B000028A22	Modello M10 SIC	Dimensioni: 44-186-232 mm.	prEN 12549 (1999)	ISO/FDIS 8662-11 (1999)
3	C416103A02	45	B000028B01	Tipo Punto 8-MG	Consumo aria: 0,28 NI/colpo (6 bar)	UNI EN ISO 3744 (1997)	ah.w.3s= inferiore a 2,5 (m/s²)
4	D416123C01	46	C710990N01	Lungh. min. 15 mm.	Pressione min.: 4,0 bar	LwA= 81,7 (dB)	
5	B000020A59	47	D710954M01	Lungh. max. 30 mm.	Pressione max.: 7,0 bar	LpA 60S 1M= 80,2 (dB)	
6	B000020A25	48	B000027A01				
7	C216160A01	49	B000025A02	Kode A710000M07	TECHNISCHE DATEN	SCHALLEISTUNG	GERAETEBEZOGENER
8	B000020A19	50	B000028B06	Modell M10 SIC	Gewicht: 1020 gr.	EWG RICHTLINIE 89/392	VIBRATIONSWERT
9	C016200A01	51	B000028B04	Klammer Typ 8-MG	Abmessungen: 44-186-232 mm.	prEN 12549 (1999)	EWG RICHTLINIE 89/392
10	D416202C01	52	B000028B02	Min. Länge 15 mm.	Luftverbrauch: 0,28 NI/pro Schlag (6 bar)	UNI EN ISO 3744 (1997)	ISO/FDIS 8662-11 (1999)
11	B000020A32	53	C710681N01	Max. Länge 30 mm.	Min. Betriebsdruck: 4,0 bar	LwA= 81,7 (dB)	ah.w.3s= unter 2,5 (m/s²)
12	B000020A31	54	C216661B01		Max. Betriebsdruck: 7,0 bar	LpA 60S 1M= 80,2 (dB)	
13	B000020A29	55	C710600N01				
14	C016220A01	56	B000021C01	Code A710000M07	TECHNICAL FEATURES	NOISE POWER	TOOL RELATED VIBRATION
15	B000025A06	57	C710540M03	Model M10 SIC	Weight: 1020 gr.	EEC DIRECTIVE 89/392	VALUE
16	C710225M03	58	C710500M01	Staple type 8-MG	Dimensions: 44-186-232 mm.	prEN 12549 (1999)	EEC DIRECTIVE 89/392
17	B000020A35	59	B000021C01	Min. length 15 mm.	Air consumption: 0,28 NI/shot (6 bar)	UNI EN ISO 3744 (1997)	ISO/FDIS 8662-11 (1999)
18	D416241C01	60	C016483B01	Max. length 30 mm.	Min. working pressure: 4,0 bar	LwA= 81,7 (dB)	ah.w.3s= below 2,5 (m/s²)
19	B000020A22	61	C416431B01		Max. working pressure: 7,0 bar	LpA 60S 1M= 80,2 (dB)	
20	C016244A01	62	C216424A01				
21	B000020A17	63	D710939M04	Code A710000M07	DONNEES TECHNIQUES	PUISSANCE ACOUSTIQUE	VALEUR DES VIBRATIONS
22	D416302A01	64	C710740M01	Modèle M10 SIC	Poids: 1020 gr.	DIRECTIVE CEE 89/392	PAR LA MACHINE
23	B000020A01	65	C710913M03	Agrafe type 8-MG	Dimensions: 44-186-232 mm.	prEN 12549 (1999)	DIRECTIVE CEE 89/392
24	B000020A03	66	B000028E02	Longueur min. 15 mm.	Consommation d'air: 0,28 NI/coup (6 bar)	UNI EN ISO 3744 (1997)	ISO/FDIS 8662-11 (1999)
25	D416361A01	67	C710758M01	Longueur max. 30 mm.	Pression de fonction min.: 4,0 bar	LwA= 81,7 (dB)	ah.w.3s= inférieur à 2,5 (m/s²)
26	C216340A01	68	C710728M07		Pression de fonction max.: 7,0 bar	LpA 60S 1M= 80,2 (dB)	
27	B000020A14	69	B000028E15				
28	D416345A01	70	D710871M07	Código A710000M07	DATOS TECNICOS	POTENCIA ACUSTICA	VIBRACION PRODUCIDA
29	B000020A14	71	C710841M01	Modelo M10 SIC	Peso: 1020 gr.	NORMATIVA 89/392 CEE	NORMATIVA 89/392 CEE
30	B000020A18	72	C710842M01	Grapa tipo 8-MG	Dimensiones: 44-186-232 mm.	prEN 12549 (1999)	ISO/FDIS 8662-11 (1999)
31	D416322A01	73	D416123C01	Largueza min. 15 mm.	Consumo de aire: 0,28 NI/disparo (6 bar)	UNI EN ISO 3744 (1997)	ah.w.3s= inferior a 2,5 (m/s²)
32	B000027B03	74	D416202C01	Largueza max. 30 mm.	Presion min.: 4,0 bar	LwA= 81,7 (dB)	
33	C710400N01	75	D710226M03		Presion max.: 7,0 bar	LpA 60S 1M= 80,2 (dB)	
34	C425262A01	76	D416241C01				
35	B000020A36	77	D416302A01	Codigo A710000M07	CARACTERISTICAS TECNICAS	POTENCIA ACUSTICA	NIVEL DE VIBRAÇÃO
36	D216283A01	78	D416361A01	Modelo M10 SIC	Peso: 1020 gr.	DIRETTIVA 89/392 CEE	DO PRODUTO
37	C710261N01	79	D216283A01	Tipo de agrafe 8-MG	Dimensões: 44-186-232 mm.	prEN 12549 (1999)	DIRETTIVA 89/392 CEE
38	B000021C03	80	D710729M07	Largura min. 15 mm.	Consumo de ar: 0,28 NI/disparo (6 bar)	UNI EN ISO 3744 (1997)	ISO/FDIS 8662-11 (1999)
39	C710402N01			Largura max. 30 mm.	Pressão min.: 4,0 bar	LwA= 81,7 (dB)	ah.w.3s= inferior a 2,5 (m/s²)
40	C650698A03				Pressão max.: 7,0 bar	LpA 60S 1M= 80,2 (dB)	
41	B000028E05						
42	B000023B01					B610040D01 O-Ring Kit	710/0 M07/01 07/11