


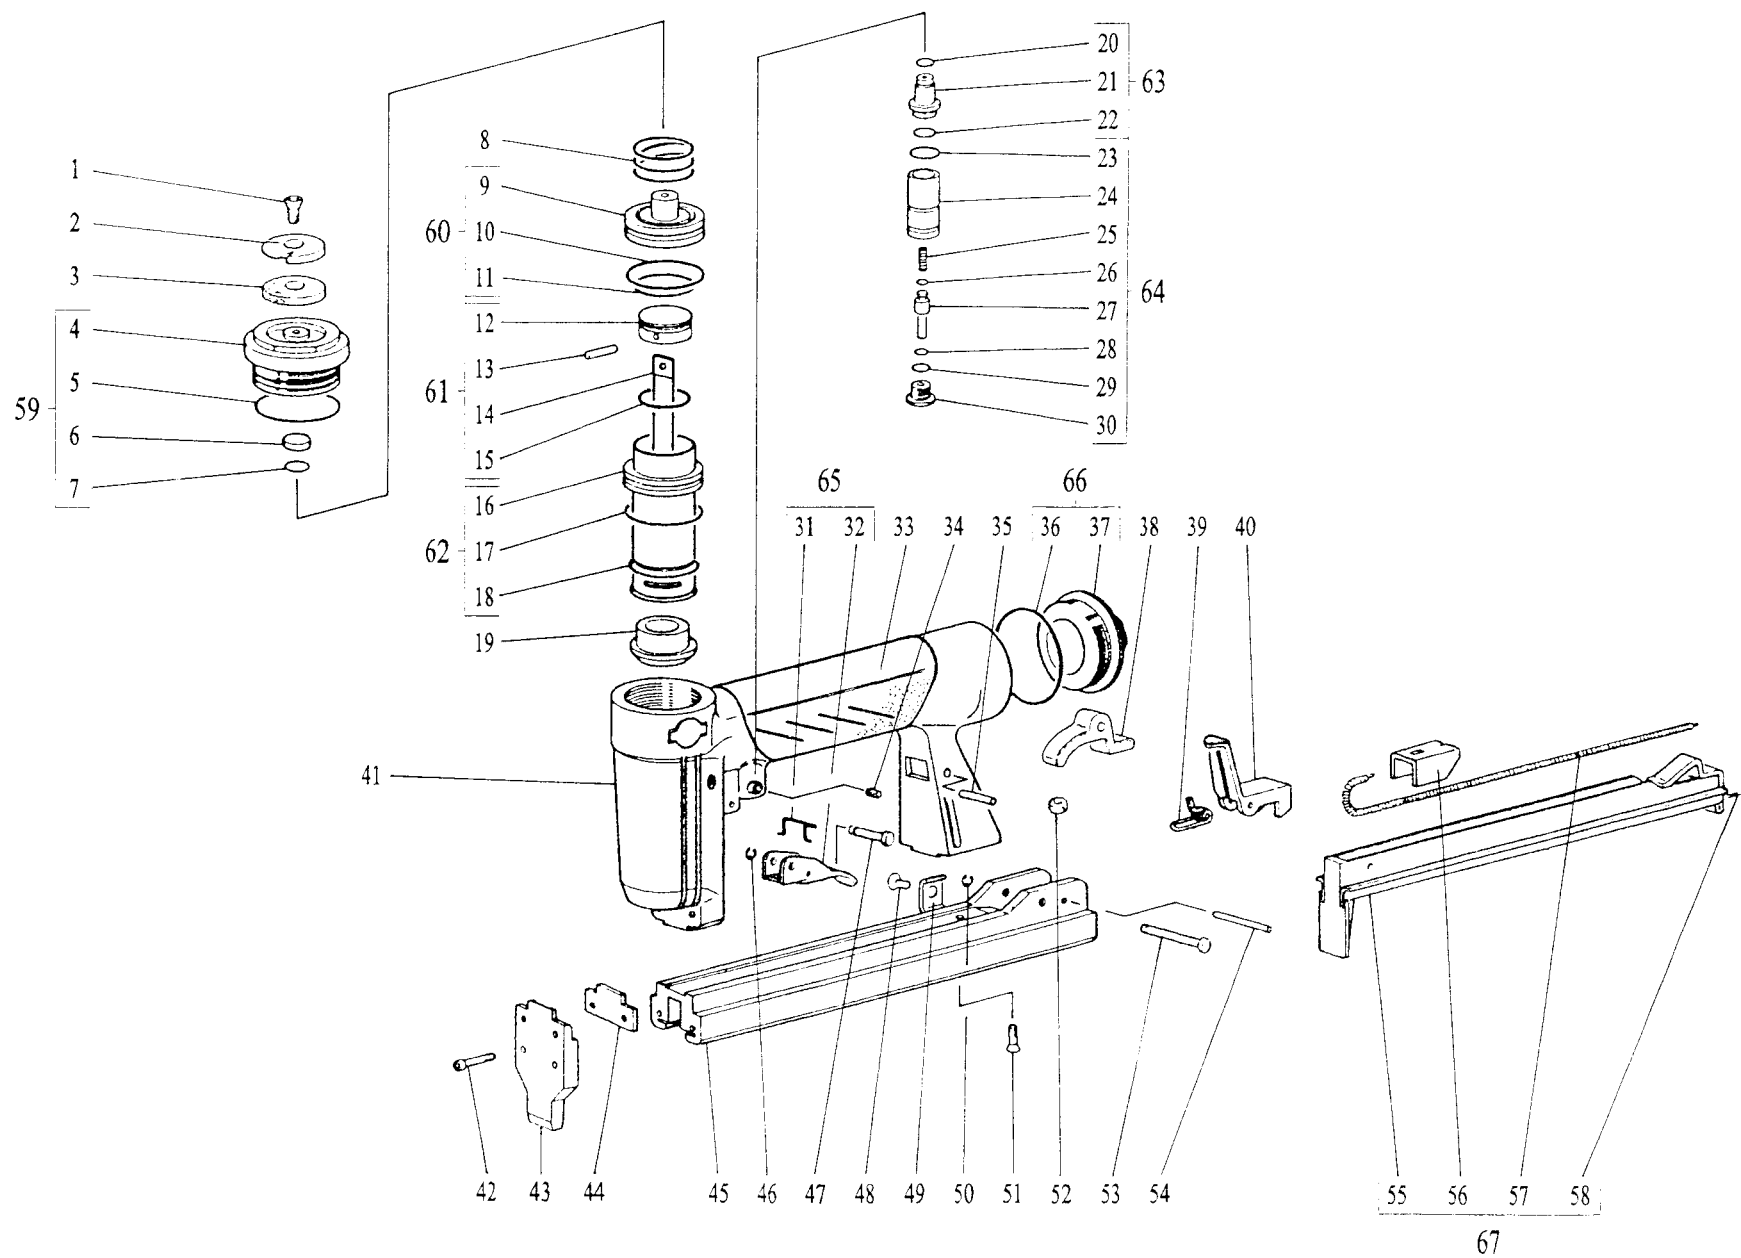

RIF.	COD.				DATI TECNICI	POTENZA ACUSTICA	VIBRAZIONI PRODOTTE
1	B000028A04	43	C610540A03	Codice A710000A01	Peso: 820 gr.	DIRETTIVA 89/392 CEE	DIRETTIVA 89/392 CEE
2	C416100A01	44	C416500A01	Modello M10	Dimensioni: 44-155-222 mm.	prEN 12549 (1999)	ISO/FDIS 8662-11 (1999)
3	C416103A02	45	C416722A01	Tipo Punto 80	Consumo aria: 0,24 NI/colpo (6 bar)	UNI EN ISO 3744 (1997)	ah.w.3s= inferiore a 2,5 (m/s²)
4	D416123A01	46	B000021C01	Lungh. min. 4 mm.	Pressione min.: 4,0 bar	LwA= 80,3 (dB)	
5	B000020A36	47	C216424A01	Lungh. max. 6 mm.	Pressione max.: 7,0 bar	LpA 60S 1M= 78,9 (dB)	
6	C216160A01	48	B000028A04				
7	B000020A19	49	C416990A01	Kode A710000A01	TECHNISCHE DATEN	SCHALLEISTUNG	GERAETEBEZOGENER
8	C016200A01	50	B000021C01	Modell M10	Gewicht: 820 gr.	EWG RICHTLINIE 89/392	VIBRATIONSWERT
9	D416202A02	51	B000028A06	Klammer Typ 80	Abmessungen: 44-155-222 mm.	prEN 12549 (1999)	EWG RICHTLINIE 89/392
10	B000020A35	52	B000023B02	Min. Länge 4 mm.	Luftverbrauch: 0,24 NI/pro Schlag (6 bar)	UNI EN ISO 3744 (1997)	ISO/FDIS 8662-11 (1999)
11	B000020A31	53	C416763A01	Max. Länge 6 mm.	Min. Betriebsdruck: 4,0 bar	LwA= 80,3 (dB)	ah.w.3s= unter 2,5 (m/s²)
12	C416220A01	54	B000026A05		Max. Betriebsdruck: 7,0 bar	LpA 60S 1M= 78,9 (dB)	
13	B000025A06	55	D416984A61				
14	C610225A03	56	C416860A01	Code A710000A01	TECHNICAL FEATURES	NOISE POWER	TOOL RELATED VIBRATION
15	B000020A29	57	C216842A01	Model M10	Weight: 820 gr.	EEC DIRECTIVE 89/392	VALUE
16	D416241A02	58	C225884A01	Staple type 80	Dimensions: 44-155-222 mm.	prEN 12549 (1999)	EEC DIRECTIVE 89/392
17	B000020A35	59	D416123A01	Min. length 4 mm.	Air consumption: 0,24 NI/shot (6 bar)	UNI EN ISO 3744 (1997)	ISO/FDIS 8662-11 (1999)
18	B000020A22	60	D416202A02	Max. length 6 mm.	Min. working pressure: 4,0 bar	LwA= 80,3 (dB)	ah.w.3s= below 2,5 (m/s²)
19	C016244A01	61	D610226A03		Max. working pressure: 7,0 bar	LpA 60S 1M= 78,9 (dB)	
20	B000020A17	62	D416241A02				
21	D416302A01	63	D416302A01	Code A710000A01	DONNEES TECHNIQUES	PUISSANCE ACOUSTIQUE	VALEUR DES VIBRATIONS
22	B000020A01	64	D416361A01	Modèle M10	Poids: 820 gr.	DIRECTIVE CEE 89/392	PAR LA MACHINE
23	B000020A03	65	D416440A01	Agrafe type 80	Dimensions: 44-155-222 mm.	prEN 12549 (1999)	DIRECTIVE CEE 89/392
24	D416361A01	66	D216283A01	Longueur min. 4 mm.	Consommation d'air: 0,24 NI/coup (6 bar)	UNI EN ISO 3744 (1997)	ISO/FDIS 8662-11 (1999)
25	C216340A01	67	D416984A61	Longueur max. 6 mm.	Pression de fonction min.: 4,0 bar	LwA= 80,3 (dB)	ah.w.3s= inférieur à 2,5 (m/s²)
26	B000020A14				Pression de fonction max.: 7,0 bar	LpA 60S 1M= 78,9 (dB)	
27	D416345A01						
28	B000020A14			Código A710000A01	DATOS TECNICOS	POTENCIA ACUSTICA	VIBRACION PRODUCIDA
29	B000020A18			Modelo M10	Peso: 820 gr.	NORMATIVA 89/392 CEE	NORMATIVA 89/392 CEE
30	D416322A01			Grapa tipo 80	Dimensiones: 44-155-222 mm.	prEN 12549 (1999)	ISO/FDIS 8662-11 (1999)
31	C016400A01			Largueza min. 4 mm.	Consumo de aire: 0,24 NI/disparo (6 bar)	UNI EN ISO 3744 (1997)	ah.w.3s= inferior a 2,5 (m/s²)
32	D416440A01			Largueza max. 6 mm.	Presion min.: 4,0 bar	LwA= 80,3 (dB)	
33	C425262A01				Presion max.: 7,0 bar	LpA 60S 1M= 78,9 (dB)	
34	B000027B03						
35	B000026A08			Codigo A710000A01	CARACTERISTICAS TECNICAS	POTENCIA ACUSTICA	NIVEL DE VIBRAÇÃO
36	B000020A36			Modelo M10	Peso: 820 gr.	DIRETTIVA 89/392 CEE	DO PRODUTO
37	D216283A01			Tipo de agrafe 80	Dimensões: 44-155-222 mm.	prEN 12549 (1999)	DIRETTIVA 89/392 CEE
38	C416764A01			Largura min. 4 mm.	Consumo de ar: 0,24 NI/disparo (6 bar)	UNI EN ISO 3744 (1997)	ISO/FDIS 8662-11 (1999)
39	C016761A01			Largura max. 6 mm.	Pressão min.: 4,0 bar	LwA= 80,3 (dB)	ah.w.3s= inferior a 2,5 (m/s²)
40	C416760A01				Pressão max.: 7,0 bar	LpA 60S 1M= 78,9 (dB)	
41	C416261A02						
42	B000028B05					B610040A01 O-Ring Kit	710/0 A01/01 07/11