


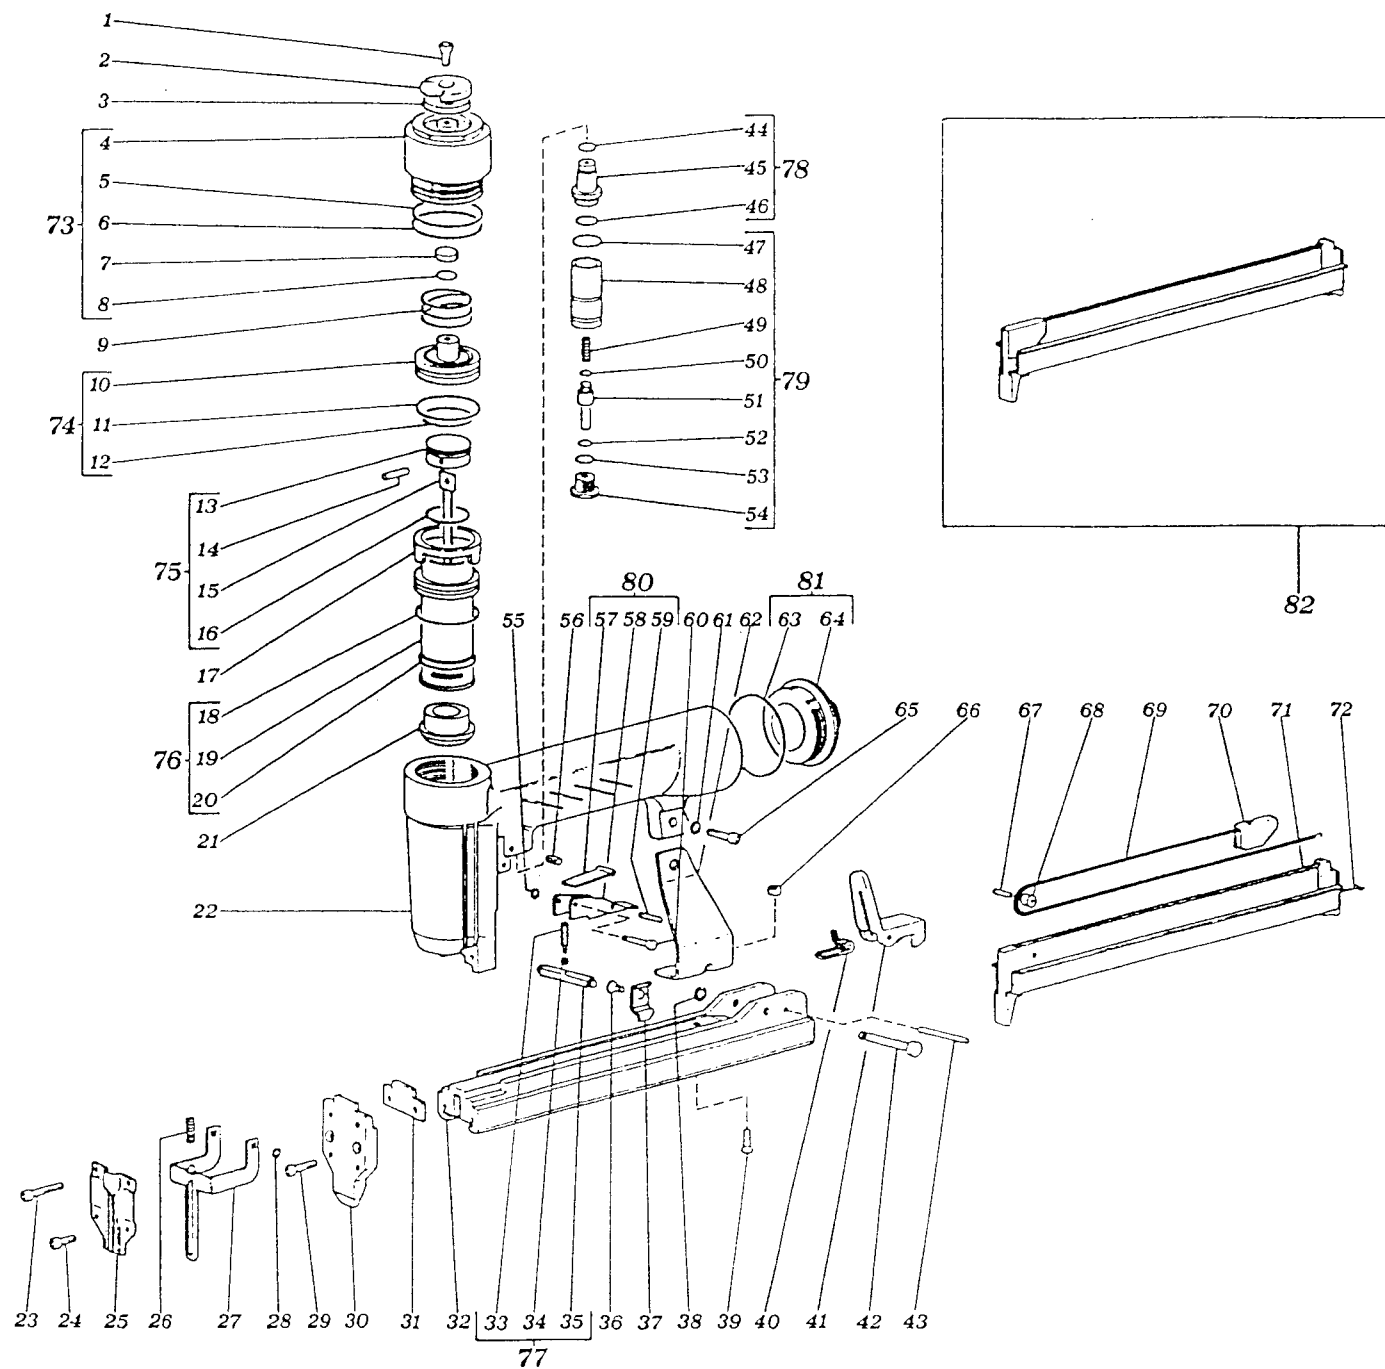

RIF.	COD.			DATI TECNICI	POTENZA ACUSTICA	VIBRAZIONE PRODOTTE	
				Codice A718000A09 Modello M18 Tipo Punto 94 Lungh. min. 15 mm. Lungh. max. 32 mm.	Peso: 1240 gr. Dimensioni: 55-214-222 mm. Consumo aria: 0,54 NI/colpo (6 bar) Pressione min.: 4,0 bar Pressione max.: 7,0 bar	DIRETTIVA 89/392 CEE prEN 12549 (1999) UNI EN ISO 3744 (1997) LwA= 81,9 (dB) LpA 60S 1M= 80,3 (dB)	DIRETTIVA 89/392 CEE ISO/FDIS 8662-11 (1999) ah.w.3s= inferiore a 2,5 (m/s²)
1	B000028A10	43	B000026A05				
2	C425100A01	44	B000020A17				
3	C425103A02	45	D416302A01				
4	D421123A01	46	B000020A01				
5	B000020A40	47	B000020A03				
6	B000020A39	48	D425361B03				
7	C225160A01	49	C216340A01	Kode A718000A09	TECHNISCHE DATEN Gewicht: 1240 gr.	SCHALLEISTUNG EWG RICHTLINIE 89/392	GERAETEBEZOGENER VIBRATIONSWERT
8	B000020A04	50	B000020A14	Modell M18	Abmessungen: 55-214-222 mm.	prEN 12549 (1999)	EWG RICHTLINIE 89/392
9	C016200A01	51	D425345B01	Klammer Typ 94	Luftverbrauch: 0,54 NI/pro Schlag (6 bar)	UNI EN ISO 3744 (1997)	ISO/FDIS 8662-11 (1999)
10	D421202A01	52	B000020A14	Min. Länge 15 mm.	Min.Betriebsdruck: 4,0 bar	LwA= 81,9 (dB)	ah.w.3s= unter 2,5 (m/s²)
11	B000020A36	53	B000020A18	Max. Länge 32 mm.	Max.Betriebsdruck: 7,0 bar	LpA 60S 1M= 80,3 (dB)	
12	B000020A33	54	D416322A01				
13	C425220A01	55	B000021C01		TECHNICAL FEATURES Weight: 1240 gr.	NOISE POWER EEC DIRECTIVE 89/392	TOOL RELATED VIBRATION VALUE
14	B000025A12	56	B000026A15	Code A718000A09	Dimensions: 55-214-222 mm.	prEN 12549 (1999)	EEC DIRECTIVE 89/392
15	C031225A06	57	C425403B02	Model M18	Air consumption: 0,54 NI/shot (6 bar)	UNI EN ISO 3744 (1997)	ISO/FDIS 8662-11 (1999)
16	B000020A31	58	D425441B02	Staple type 94	Min.working pressure: 4,0 bar	LwA= 81,9 (dB)	ah.w.3s= below 2,5 (m/s²)
17	C425242A01	59	C230405A01	Min. length 15 mm.	Max.working pressure: 7,0 bar	LpA 60S 1M= 80,3 (dB)	
18	B000020A39	60	C620424A01	Max. length 32 mm.			
19	D421241A02	61	B000022C01		DONNEES TECHNIQUES Poids: 1240 gr.	PUISSANCE ACOUSTIQUE DIRECTIVE CEE 89/392	VALEUR DES VIBRATIONS PAR LA MACHINE
20	B000020A24	62	C030701A01	Code A718000A09	Dimensions: 55-214-222 mm.	prEN 12549 (1999)	DIRECTIVE CEE 89/392
21	C225244A01	63	B000020A36	Modèle M18	Consommation d'air: 0,54 NI/coup (6 bar)	UNI EN ISO 3744 (1997)	ISO/FDIS 8662-11 (1999)
22	C618261A02	64	D425283A01	Agrafe type 94	Pression de fonction min.: 4,0 bar	LwA= 81,9 (dB)	ah.w.3s= inférieur à 2,5 (m/s²)
23	B000028B07	65	B000028B12	Longueur min. 15 mm.	Pression de fonction max.: 7,0 bar	LpA 60S 1M= 80,3 (dB)	
24	B000028B02	66	B000023B02	Longueur max. 32 mm.			
25	C032681A01	67	C216824A01		DATOS TECNICOS Peso: 1240 gr.	POTENCIA ACUSTICA NORMATIVA 89/392 CEE	VIBRACION PRODUCIDA NORMATIVA 89/392 CEE
26	C216661B01	68	C216820A01	Código A718000A09	Dimensiones: 55-214-222 mm.	prEN 12549 (1999)	ISO/FDIS 8662-11 (1999)
27	C032600A01	69	C216842A01	Modelo M18	Consumo de aire: 0,54 NI/disparo (6 bar)	UNI EN ISO 3744 (1997)	ah.w.3s= inferior a 2,5 (m/s²)
28	B000021C01	70	C231860A01	Grapa tipo 94	Presion min.: 4,0 bar	LwA= 81,9 (dB)	
29	B000028B05	71	D031984A03	Largueza min. 15 mm.	Presion max.: 7,0 bar	LpA 60S 1M= 80,3 (dB)	
30	C031540A06	72	C225884A01	Largueza max. 32 mm.			
31	C030500A01	73	D421123A01		CARACTERISTICAS TECNICAS Peso: 1240 gr.	POTENCIA ACUSTICA DIRECTIVA 89/392 CEE	NIVEL DE VIBRAÇÃO DO PRODUTO
32	C031722A01	74	D421202A01		Dimensões: 55-214-222 mm.	prEN 12549 (1999)	DIRETTIVA 89/392 CEE
33	C030486B01	75	D421226A06	Codigo A718000A09	Consumo de ar: 0,54 NI/disparo (6 bar)	UNI EN ISO 3744 (1997)	ISO/FDIS 8662-11 (1999)
34	C030487B01	76	D421241A02	Modelo M18	Pressão min.: 4,0 bar	LwA= 81,9 (dB)	ah.w.3s= inferior a 2,5 (m/s²)
35	D030484B01	77	D030484B01	Tipo de agrafe 94	Pressão max.: 7,0 bar	LpA 60S 1M= 80,3 (dB)	
36	B000028A04	78	D416302A01				
37	C416990A02	79	D425361B03				
38	B000021C01	80	D425441B02				
39	B000028A04	81	D425283A01				
40	C016761A01	82	D031984A03				
41	C425760A01						
42	C416763A01					B618040D01 O-Ring Kit	718/0 A09/01 07/11