


UNI-ISO 10102

- Ingombro delle teste ridotto.
- Coppie di serraggio nettamente superiori a quelle delle norme ISO 1711-1

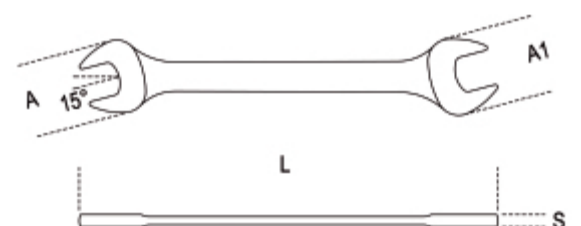

art.	mm	L mm	A mm	A1 mm	S mm	g
000550003	4x5	101	12,5	14,0	3,0	12
000550006	5x5,5	101	12,5	14,0	3,0	12
000550009	5,5x7	120	15,5	17,5	3,5	21
• 000550012	6x7	120	15,5	17,5	3,5	21
000550018	7x8	140	19,5	21,5	4,0	32
• 000550021	8x9	140	19,5	21,5	4,0	34
000550024	8x10	140	19,5	21,5	4,0	34
• 000550030	10x11	155	23,5	25,5	4,5	47
000550033	10x12	155	23,5	25,5	4,5	45
000550035	10x13	170	27,5	29,5	5,0	68
• 000550042	12x13	170	27,5	29,5	5,0	69
000550045	12x14	170	27,5	29,5	5,0	63
000550047	13x14	185	31,5	33,5	5,5	87
000550051	13x17	189	31,5	37,5	6,0	114
• 000550054	14x15	185	31,5	33,5	5,5	92
000550057	14x17	189	31,5	37,5	6,0	99
• 000550060	16x17	202	35,5	37,5	6,0	122
000550063	17x19	220	39,5	41,5	6,5	147
• 000550066	18x19	220	39,5	41,5	6,5	134
000550069	19x22	236	43,5	47,5	7,0	204
• 000550075	20x22	236	43,5	47,5	7,0	207
• 000550078	21x23	245	45,5	49,5	7,6	245
000550081	22x24	245	45,5	49,5	7,6	233
• 000550087	24x26	262	51,5	55,5	8,0	300
000550090	24x27	262	51,5	55,5	8,0	310
• 000550096	25x28	272	53,5	59,5	8,6	359
• 000550099	27x29	284	57,5	61,5	8,8	393
000550102	27x30	284	57,5	61,5	8,8	405
000550105	27x32	297	63,5	67,5	9,0	492
• 000550108	30x32	297	63,5	67,5	9,0	490
000550114	32x36	325	68,4	76,1	11,0	612
000550117	34x36	325	68,4	76,1	11,0	614
000550120	35x38	375	76,0	85,6	13,0	856
000550123	36x41	375	76,0	85,6	13,0	858
000550129	41x46	425	85,6	94,8	14,0	1200
000550132	46x50	475	94,8	104,0	15,0	1785
000550135	50x55	500	106,8	113,8	16,0	2000
000550138	55x60	500	106,8	113,8	16	2350