



## W2K121 Series

Tubeaxial

127x127x38mm

- AC fans with external rotor shaded-pole motor. Impedance protected against overloading.
- Metal fan housing, impeller of plastic PA.
- Air exhaust over struts. Rotational direction CCW looking at rotor.
- Mounting from either face using two 4.5 mm holes.
- Electrical connection via 2 flat pins 2.8 x 0.5 mm.
- Fan housing with ground lug for screw M 4x6 DIN 7500-C.
- UL, CSA, VDE approvals on some models, please contact application engineering.



| Part Number    | Curve | CFM @ 0 | VAC | Hertz | Power (W) | dBA | Max Amb. Temp C | Bearing Type | Features  | Wgt. (lbs) |
|----------------|-------|---------|-----|-------|-----------|-----|-----------------|--------------|-----------|------------|
| W2K121-AB11-13 | 1     | 106     | 115 | 50/60 | 14        | 41  | 65              | Ball         | Terminals | 1.25       |
| W2K121-AB11-39 | 1     | 106     | 115 | 50/60 | 14        | 41  | 55              | Sintec       | Terminals | 1.25       |
| W2K121-AA15-01 | 2     | 121     | 115 | 50/60 | 17        | 47  | 75              | Ball         | Leads     | 1.25       |
| W2K121-AA15-03 | 2     | 121     | 115 | 50/60 | 17        | 47  | 75              | Sintec       | Leads     | 1.25       |
| W2K121-AA15-13 | 2     | 121     | 115 | 50/60 | 17        | 47  | 75              | Ball         | Terminals | 1.25       |
| W2K121-AA15-39 | 2     | 121     | 115 | 50/60 | 17        | 47  | 75              | Sintec       | Terminals | 1.25       |
| W2K121-AB07-13 | 1     | 106     | 230 | 50/60 | 14        | 41  | 65              | Ball         | Terminals | 1.25       |
| W2K121-AB07-39 | 1     | 106     | 230 | 50/60 | 14        | 41  | 55              | Sintec       | Terminals | 1.25       |
| W2K121-AA01-01 | 2     | 121     | 230 | 50/60 | 17        | 47  | 75              | Ball         | Leads     | 1.25       |
| W2K121-AA01-03 | 2     | 121     | 230 | 50/60 | 17        | 47  | 75              | Sintec       | Leads     | 1.25       |
| W2K121-AA01-13 | 2     | 121     | 230 | 50/60 | 17        | 47  | 75              | Ball         | Terminals | 1.25       |
| W2K121-AA01-39 | 2     | 121     | 230 | 50/60 | 17        | 47  | 75              | Sintec       | Terminals | 1.25       |

### Fan Type

AA01-01 AA01-03 AA15-01 AA15-03

### Lead Wires

269 mm long AWG 22

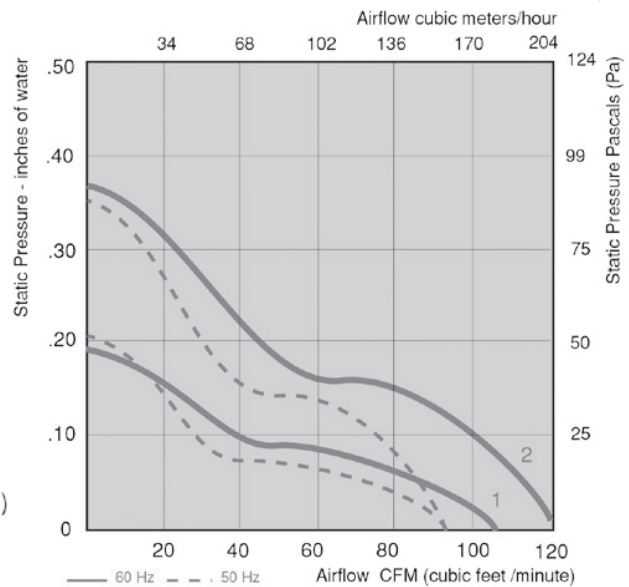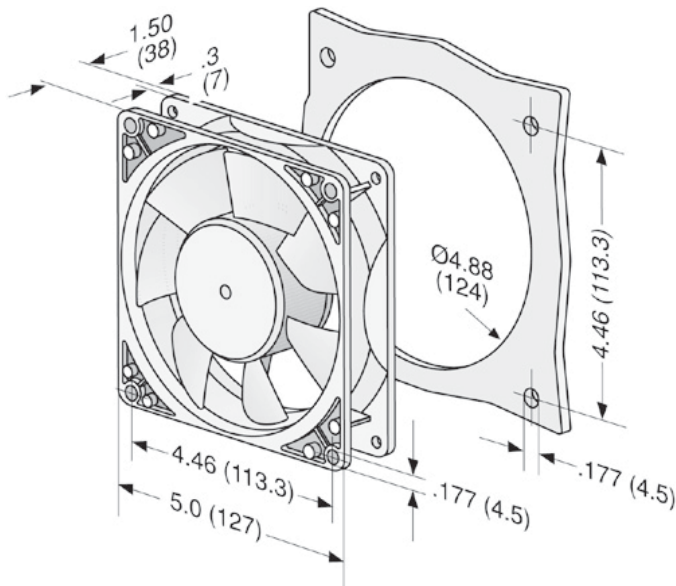

**ebm papst**

e-mail: [sales@us.ebmpapst.com](mailto:sales@us.ebmpapst.com) • TEL: 860-674-1515 • FAX: 860-674-8536

ebm-papst Inc., 100 Hyde Road, Farmington, CT 06034 USA

ebm-papst Inc., 2004 © ebm-papst Inc. reserves the right to change any specifications or data without notice